


MNT-ND-JBOX-3


Waterproof Junction Box
installation guide

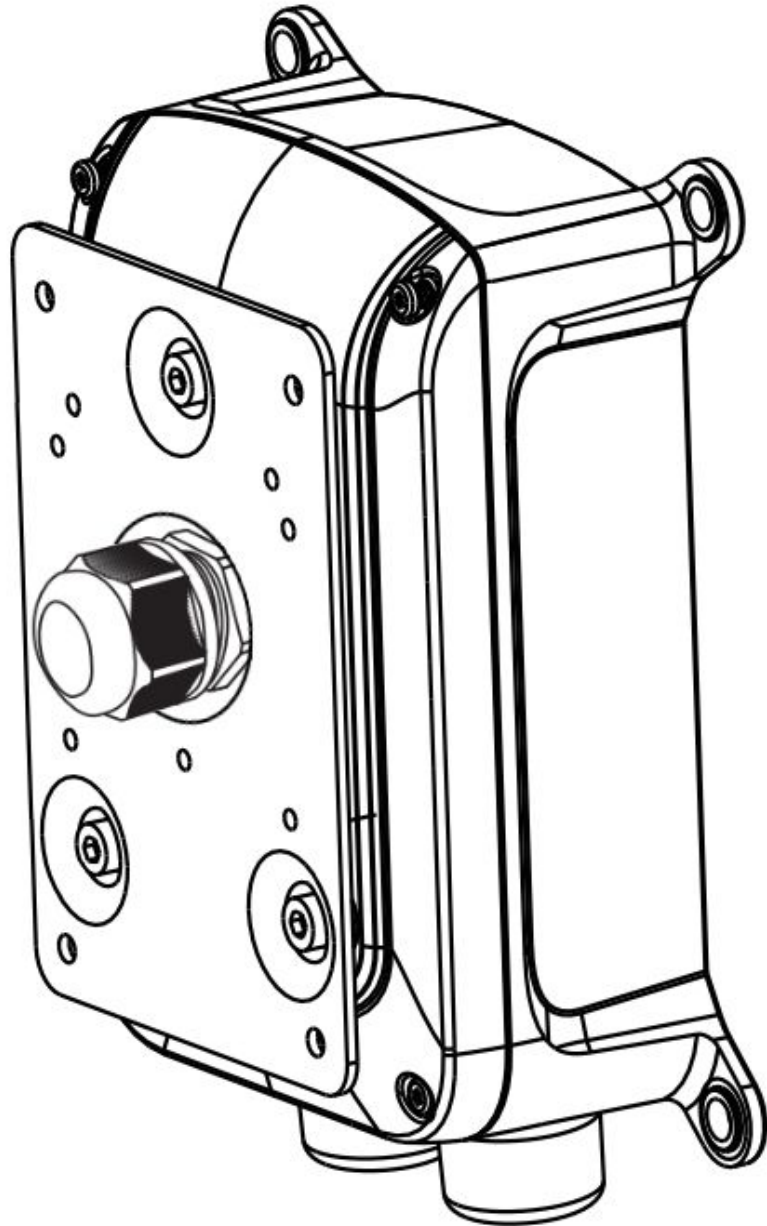

Compatible with: IPND-P2040X-IRW1

Installation


Mounting Hole Guide

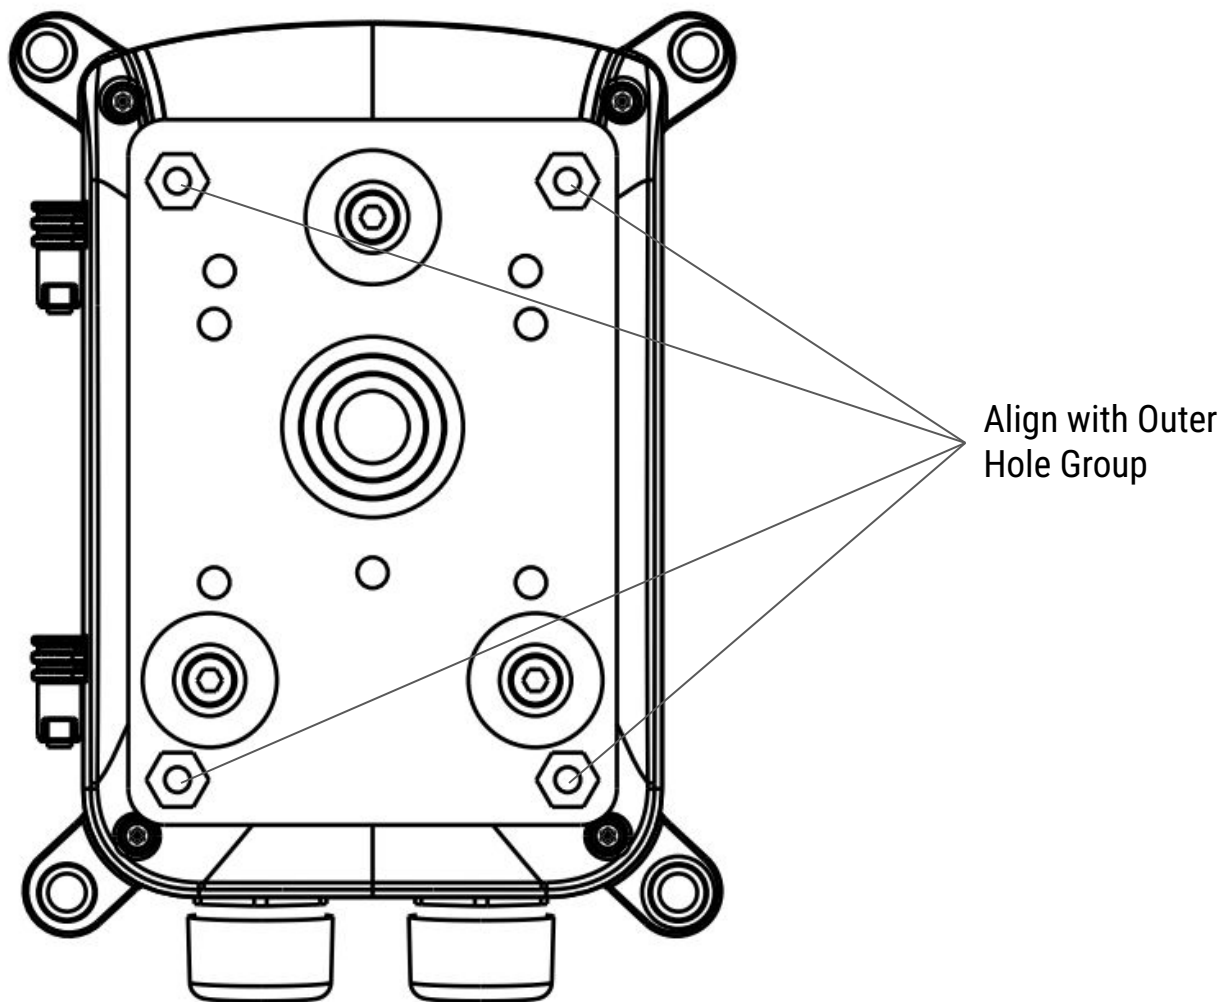


Hole Group	Applicable Camera	Screws Type	# of Screws
Outer	IPND-P2040X-IRW1	M8	4

Mount Installation - IPND-P2040X-IRW1

1. Determine a hard surface wall location. Use the four mounting holes of the junction box as a template for marking the positions of where holes will need to be drilled to secure the box.

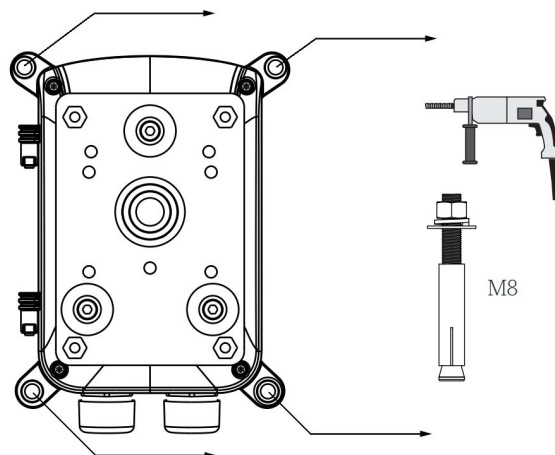

2. If using the included wedge anchors, drill hole in diameter of 9.5 mm or 3/8" and 4 cm in depth. Install the mounting hardware, then secure the junction box to the wall.
3. Route cables into junction box.
4. Unscrew the 4 torx bolts that secure the junction box door in place and swing the door open.
5. Route cables through the door, then through the PTZ arm. It is recommended to use a jumper cable lead from the inside of the junction box to the PTZ.
6. Align the PTZ arm with the outer bolt pattern of the junction box door, then bolt the arm to the door.
7. Connect cables to the PTZ, then secure the PTZ to the arm. See camera QSG for detailed instructions.

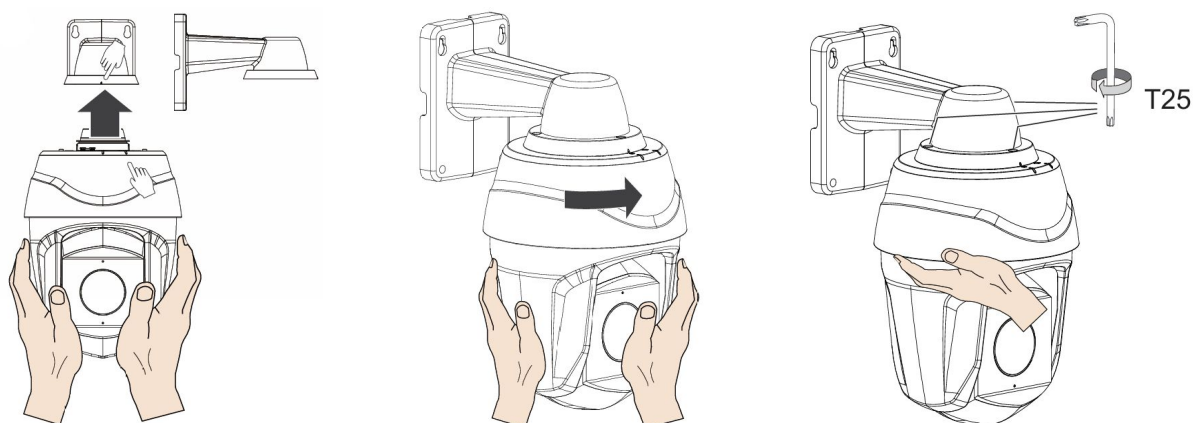

8. Close the junction box door and tighten down doors 4 torx bolts. If a jumper cable lead was used, connect cables prior to closing door.
9. Power PTZ on and proceed with initial setup.