
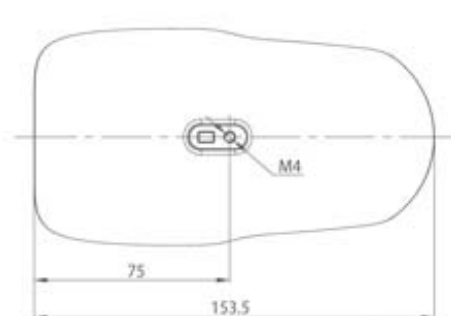
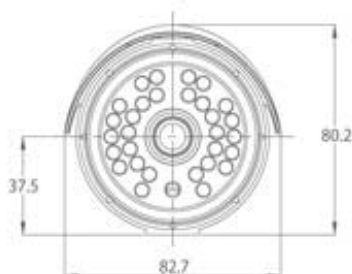


ICIP B565IR-P: High Resolution Vandal proof Weatherproof Bullet IP Camera POE

- 1/3" SONY Super HAD CCD image sensor
- High-performance TI DaVinci series DSP
- H.264 video compression and JPEG image capture
- 30fps at D1/HD1/CIF/VGA resolution
- Dual encoding streams supported
- Multi-zone video detection and privacy masking
- Support Alarm I/O, RS485 interface
- Max 32GB Hot-swappable SD card for local storage
- Built-in high performance IR LEDs(30~60 feet/10~20 meters)
- IP 65 protection level
- PoE (IEEE802.3af) (-P model)
- Built-in web server, NVR, MSS & CMS

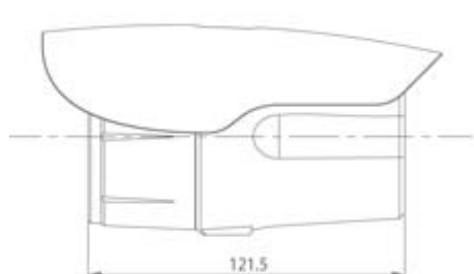

General	
Processor	TI DaVinci Series DSP
Operating System	Embedded LINUX
Resource	Simultaneous remote monitoring, local recording and remote control
User Interface	WEB, CMS(DSS, PSS)
Camera	
Image Sensor	1/3" SONY Super HAD CCD
Effective Pixels	PAL: 752(H) x 582 (V) NTSC:768 (H) x 494 (V)
Horizontal Resolution	540TVL(Color), B/W(600TVL)
Electronic Shutter	Auto/Manual, 1/50~1/10000s
Mini. Illumination	0LUX/F1.2(IR on), 0.1LUX/F1.2
Signal Noise Ratio	>50dB
Gain Control	Auto
White Balance	Auto/Manual
Day/Night	Yes
Lens	M12-mount, 6mm/F1.2, FOV: 42°
Video	
Video Compression	H.264
Resolution	D1(704x480) / HD1(352x480) / CIF(352x240) / QCIF(176x128) / VGA(640x480) / QVGA(320x240) / QQVGA(160x120)
Encoding Speed	Main Stream: D1/HD1/CIF/QCIF/VGA QVGA/QQVGA(1~25fps) Extra Stream: D1/HD1/CIF/QCIF/VGA QVGA/QQVGA(1~25fps)
Bit Rate	32K~4Mbps
Snapshot	Fastest 1fps JPEG capture
Video Format	NTSC/PAL
Analogue Video Output	1 channel BNC(1.0Vp-p, 75)
Audio	
Audio Compression	PCM(64Kbps) / G.711a(32Kbps) / AMR(10.2Kbps)
Input	1 channel 3.5mm Jack Mic in
Output	1 channel 3.5mm Jack Speak out
Network	
Ethernet	RJ-45 (10/100Base-T)
Network Functions	HTTP, TCP/IP, ICMP, RTSP, RTP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, , Alarm Server
Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information, Maintenance & Upgrade
Auxiliary Interface	
SD Card	MicroSD, Max 32GB, local storage
RS485	PTZ control
Alarm	2 Input / 1 Output
Environmental	
Power Supply	DC 12V, PoE(-P model)
Power Consumption	<7W
Operating Environment	14 °F~130 °F / -10 °C~+55 °C, 10%~90%
Dimension	φ3.16"x4.78" / φ80.2mmx121.5mm
Weight	1.1lb/500g