



# IH-C6220

## 1.3 Megapixel Outdoor Station Camera


### Features

- Being equipped with advanced built-in system and software, suit for villa
- Camera: 1.3 mega pixel camera
- Temper glass panel for water-proof (IP65)
- Night vision: the particular white light in the camera able to make the clear picture at night
- One button with background light ,easy to operate
- Call indoor monitor and management centre
- Open with IC card
- Support unlock remotely
- Support customized call period function
- Support group call function
- This unit works directly with the IH-D7210 Monitor



### Overview

#### Dimensions

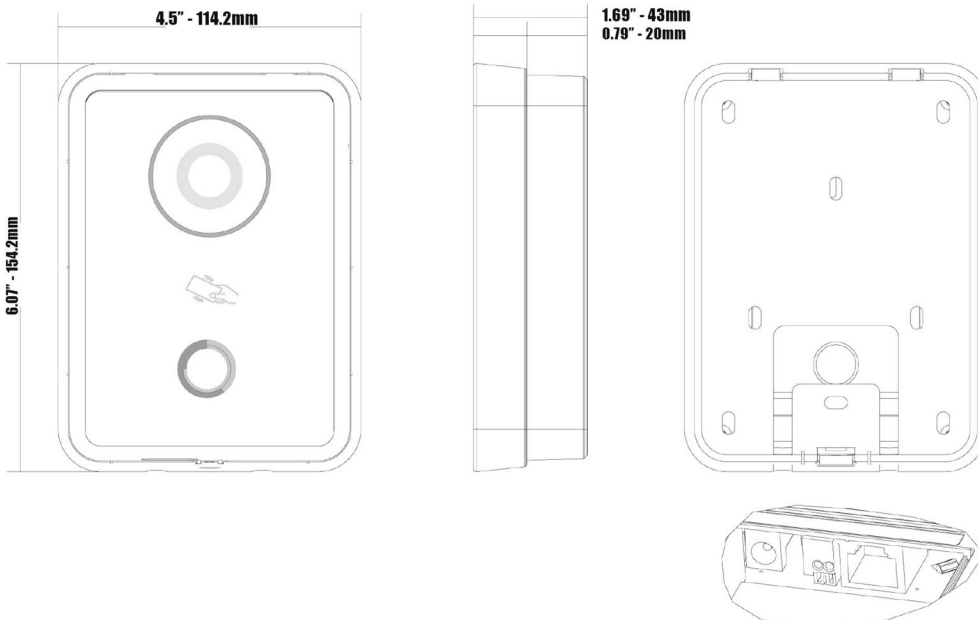

#### Head Office

IC Realtime  
3050 N Andrews Ave AXE  
Pompano Beach,  
FL 33064

Tel: 1 (866) 997-9009  
Fax: 1 (954) 827-5900  
Email: [Info@icrealtime.com](mailto:Info@icrealtime.com)  
Web: [www.icrealtime.com](http://www.icrealtime.com)

#### West Coast Office

IC Realtime  
14180 West Van Buren St.  
Suite B105  
Goodyear, AZ 85338

Tel: 1 (602) 910-3432  
Fax: 1 (602) 626 3545  
Email: [west@icrealtime.com](mailto:west@icrealtime.com)  
Web: [www.icrealtime.com](http://www.icrealtime.com)

# IH-C6220

## Specifications

|                                 |                                                          |
|---------------------------------|----------------------------------------------------------|
| Model                           | IHC6220                                                  |
| <b>System</b>                   |                                                          |
| Main Processor                  | Embedded micro processor                                 |
| Operation System                | Embedded LINUX OS                                        |
| <b>Video</b>                    |                                                          |
| Video Compression Standar       | H.264                                                    |
| Input/Approaching Inducti       | VGA CMOS camera                                          |
| Black Light                     | Support                                                  |
| <b>Audio</b>                    |                                                          |
| Audio Input                     | All-direction Microphone                                 |
| Audio Output                    | Built-in speaker                                         |
| Bidirectional Talk              | Support dual-way bidirectional talk                      |
| <b>Operation Mode</b>           |                                                          |
| Input                           | Digital keyboard                                         |
| Card                            | Built-in IC card induction reader                        |
| <b>Alarm and Access Control</b> |                                                          |
| Vandal proof                    | Support                                                  |
| Access control                  | Support by expansion mode                                |
| <b>Network</b>                  |                                                          |
| Ethernet                        | 10M/100Mbps Self-adaptive                                |
| Network Protocol                | TCP/IP,SNMP,MDI/MDI-X Self-adaptive                      |
| <b>Storage</b>                  |                                                          |
| Memory                          | 128MB                                                    |
| <b>Others</b>                   |                                                          |
| Power                           | DC 10~15V                                                |
| Power Consumption               | Standby ≤1W, work ≤5W                                    |
| Working Environments            | 14°F~130°F/-10°C~+55°C / 10~90%RH / 86~106kpa            |
| Water Proof                     | IP65                                                     |
| Dimensions                      | 6.07" x 4.5" x 1.69" // 154.2mm*114.2mm*43.0mm ( L*W*T ) |
| Weight                          | 0.27lb ~ 0.6Kg                                           |

### Head Office

IC Realtime  
3050 N Andrews Ave AXE  
Pompano Beach,  
FL 33064

Tel: 1 (866) 997-9009  
Fax: 1 (954) 827-5900  
Email: [Info@icrealtime.com](mailto:Info@icrealtime.com)  
Web: [www.icrealtime.com](http://www.icrealtime.com)

### West Coast Office

IC Realtime  
14180 West Van Buren St.  
Suite B105  
Goodyear, AZ 85338

Tel: 1 (602) 910-3432  
Fax: 1 (602) 626 3545  
Email: [west@icrealtime.com](mailto:west@icrealtime.com)  
Web: [www.icrealtime.com](http://www.icrealtime.com)