
ICR101X: Mini High Speed Dome Camera

Operation Manual



ICR101X: Mini High Speed Dome Camera

Copyright 2007 ICRealtime, Inc. Made in Korea



The lightning flash with an arrowhead symbol, within an equilateral triangle is intended to alert the user to the presence of uninsulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

INFORMATION - This equipment has been tested and found to comply with limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

WARNING - Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

CAUTION : To prevent electric shock and risk of fire hazards:

- ◆ Do NOT use power sources other than that specified.
- ◆ Do NOT expose this appliance to rain or moisture.

This installation should be made by a qualified service person and should conform to all local codes.

NOTICE

Important Safeguard

- 1. Read Instructions**
Read all of the safety and operating instructions before using the product.
- 2. Retain Instructions**
Save these instructions for future reference.
- 3. Attachments / Accessories**
Do not use attachments or accessories unless recommended by the appliance manufacturer as they may cause hazards, damage product and void warranty.
- 4. Water and Moisture**
Do not use this product near water or moisture.
- 5. Installation**
Do not place or mount this product in or on an unstable or improperly supported location. Improperly installed product may fall, causing serious injury to a child or adult, and damage to the product. Use only with a mounting device recommended by the manufacturer, or sold with the product. To insure proper mounting, follow the manufacturer's instructions and use only mounting accessories recommended by manufacturer.
- 6. Power source**
This product should be operated only from the type of power source indicated on the marking label.

Precautions

- **Operating**
 - Before using, make sure power supply and others are properly connected.
 - While operating, if any abnormal condition or malfunction is observed, stop using the camera immediately and then contact your local dealer.
- **Handling**
 - Do not disassemble or tamper with parts inside the camera.
 - Do not drop or subject the camera to shock and vibration as this can damage camera.
 - Care must be taken when you clean the clear dome cover. Especially, scratch and dust will ruin your quality of camera.
- **Installation and Storage**
 - Do not install the camera in areas of extreme temperature, which exceed the allowable range.
 - Avoid installing in humid or dusty places.
 - Avoid installing in places where radiation is present.
 - Avoid installing in places where there are strong magnetic fields and electric signals.
 - Avoid installing in places where the camera would be subject to strong vibrations.
 - Never expose the camera to rain and water.

CONTENTS

■ Introduction 1	
Features	04
Product & Accessories	06
Parts Name & Functions	07
■ Installation 2	
DIP Switch Setup	08
Direct Installation on the Ceiling	10
Installation using Ceiling Mount Bracket	11
Installation using Wall Mount Bracket	12
Cabling	13
■ Operation	
Check points before operation	15
Preset and Pattern Function Pre-Check	15
Starting OSD Menu	16
Reserved Preset	16
Preset	17
Swing	17
Pattern	18
Group	19
Other Functions	20
OSD Display of Main Screen	21
■ How to use OSD Menu	
General Rules of Key Operation for Menu	22
Main Menu	22
Display Setup	23
Privacy Zone Mask Setup	24
Camera Setup	25
Motion Setup	27
Preset Setup	29
Swing Setup	31
Pattern Setup	32
Group Setup	33
System Initialize	35
■ Specifications	
Dimension	36
	37

■ INTRODUCTION 1

Features

■ Camera Specifications

- CCD Sensor : 1/4" Interline Transfer CCD
- Zoom Magnification : × 10 Optical Zoom, × 10 Digital Zoom (Max×100 Zoom)
- Day & Night Function
- Various Focus Mode : Auto-Focus / Manual Focus / Semi-Auto Focus.
- Independent & Simultaneous Camera Characteristic Setup in Preset operation

■ Powerful Pan/Tilt Functions

- Max. 360°/sec high speed Pan/Tilt Motion
- Using Vector Drive Technology, Pan/Tilt motions are accomplished in a shortest path. As a result, time to target view is reduced dramatically and the video on the monitor is very natural to watch.
- For pg operation using a controller, since ultra slow speed 0.05°/sec can be reached, it is very easy to locate camera to desired target view. Additionally it is easy to move camera to a desired position with zoom-proportional pan/tilt movement.

■ Preset, Pattern, Swing, Group, Privacy Mask and More...

- MAX. 127 Presets are assignable and characteristics of each preset can be set up independently, such as White Balance, Auto Exposure, Label and so on.
- Max. 8 set of Swing action can be stored. This enables to move camera repetitively between two preset positions with designated speed.
- Max. 4 of Patterns can be recorded and played back. This enables to move camera to follow any trajectory operated by joystick as closely as possible.
- Max. 8 set of Group action can be stored. This enables to move camera repetitively with combination of Preset or Pattern or Swing. A Group is composed of max. 20 entities of Preset/Pattern/Swings.
- Privacy Masks are assignable, not to intrude on other's privacy. (4 Privacy Zones)

■ PTZ(Pan/Tilt/Zoom) Control

- With RS-485 communication, max. 255 of cameras can be controlled at the same time.
- Pelco-D or Pelco-P protocol can be selected as a control protocol in the current version of firmware.

■ INTRODUCTION

■ OSD(On Screen Display) Menu

- OSD menu is provided to display the status of camera and to configure the functions interactively.
- The information such as Camera ID, Pan/Tilt Angle, Alarm Input and Preset can be displayed on screen.

■ Alarm I/O Functions


- 4 alarm sensor Inputs are available.
- To reject external electric noise and shock perfectly, alarm sensor input is decoupled with photo coupler.
- The signal range of sensor input is from DC 5.0 to 12.0 volts to adopt various applications.
- If an external sensor is activated, camera can be set to move to the corresponding Preset position.

■ Reserved Presets for Special Purpose


- Most camera characteristics can be set up easily and directly with reserved preset, not entering into OSD menu. For more information, refer to "Reserved Preset" in this manual.

Product & Accessories


Product & Accessories

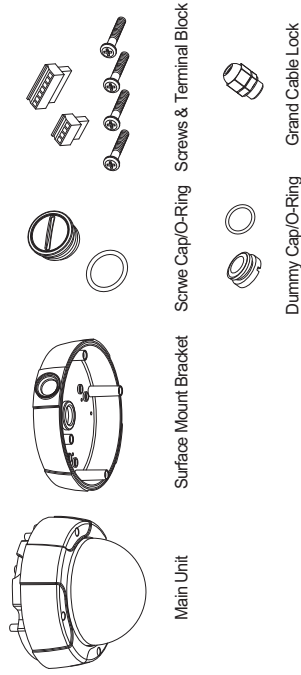

Options

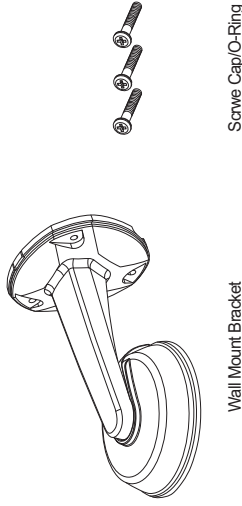


Parts Name & Functions

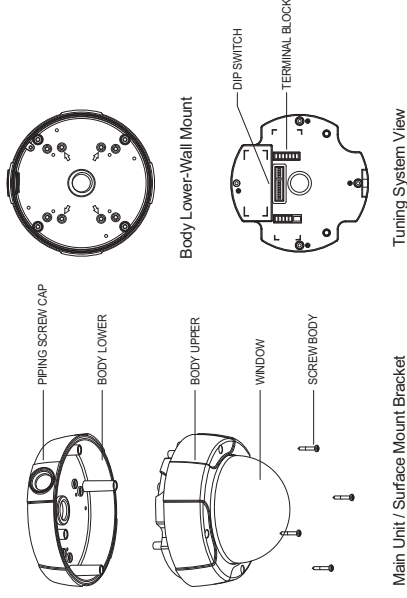


- **Dome Cover** : Do not detach protection vinyl from dome cover before finishing all installation process to protect dome cover from scratches or dust.
- **Surface Mount Bracket** : This is used to install the camera directly on the ceiling. After separating this cover first and then attach this directly to ceiling. Camera must be assembled at the last stage. Do not use this bracket when installing camera on the wall with wall mount bracket or on the ceiling with ceiling mount bracket.
- **Lockup Screw** : Fixes main unit to surface mount bracket.
- **Cabling Terminal Block** : During installation, Power, Video, Communication, Alarm Input cables are connected on to this cabling terminal block.
- **DIP Switch** : Adjusts camera ID and protocols.

DIP Switch Setup

Before you install the camera, you should set the DIP switches to configure the camera ID, communication protocol.

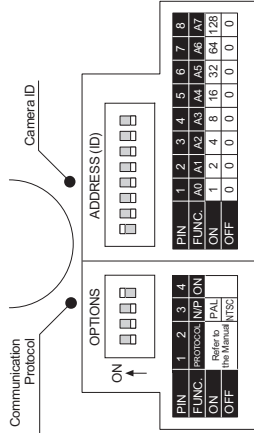

Camera ID Setup



ID number of camera is set using binary number. The example is shown below.

- ID number of camera is set using binary number. The example is shown below.
- The range of ID is 1~255. Do not use 0 as camera ID. Factory default of Camera ID is 1.
- If you want to control a certain camera, you must match the camera ID with Cam ID setting of DVR or Controller.


Communication Protocol Setup

Select the appropriate Protocol with DIP switch combination.

Switch State		Protocol
P0 (Pin 1)	P1 (Pin 2)	
OFF	OFF	PELCO-D, 2400 bps
ON	OFF	PELCO-D, 9600 bps
OFF	ON	PELCO-P, 4800 bps
ON	ON	PELCO-P, 9600 bps

- If you want to control using DVR or P/T controller, their protocol must be identical to camera. Otherwise, you can not control the camera.
- If you changed camera protocol by changing DIP SW, the change will be effective after you reboot the camera.
- Factory default of protocol is "Pelco-D, 2400 bps".


Reserved for Supplier




- Since Pin 3 ~ Pin 4 is only for supplier, DO NOT CHANGE THESE ITS ORIGINAL STATE. If you change one of these, proper operation can not be achieved.
- Pin 3 : PAL / NTSC system selection of Camera. DO NOT CHANGE THIS PIN.
- Pin 4 : Factory default is ON state. This pin is used for system firmware upgrade. DO NOT CHANGE THIS PIN.

Direct Installation on the Ceiling


- ① Establish to the direction of cables
A. When cables exist to the upside




- B. When cables exist to the side




- ③ Screw surface mount bracket to ceiling with 4 screws.




- ④ Wire cables to terminal block and connect the terminal blocks to main unit.

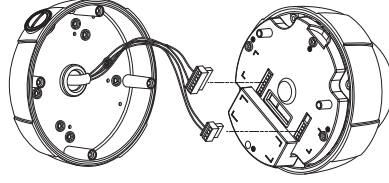

- ⑤ Screw main unit to surface mount bracket with 4 lock-up screws.

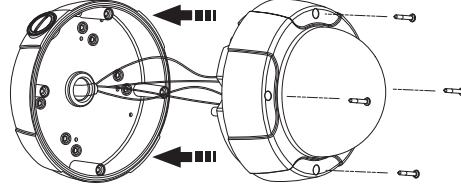


- ⑥ Detach protection vinyl from dome cover.




Installation using Wall Mount Bracket


- ③ Wire cables to terminals and connect the terminals to main unit. Do not use surface mount bracket!

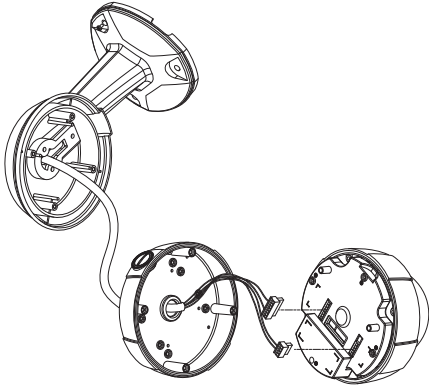


- ② Screw wall mount bracket to ceiling with 3 screws.



- ④ Screw main unit to wall mount bracket with 4 screws. Detach protection vinyl from dome cover.



Cabling

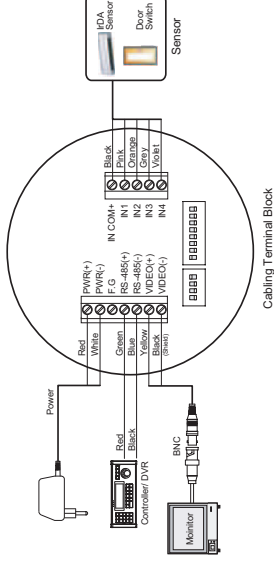


Power Connection

- Please, check the voltage and current capacity of rated power carefully. Rated power is indicated in the back of main unit.

Rated Power	Input Voltage Range	Current Consumption
DC 12V	DC 11V ~ 18V	0.8 A
AC 24V	AC 17V ~ 29V	0.4 A

RS-485 Communication

- For PTZ control, connect this line to keyboard and DVR. To control multiple cameras at the same time, RS-485 communication lines of them is connected in parallel as shown below.

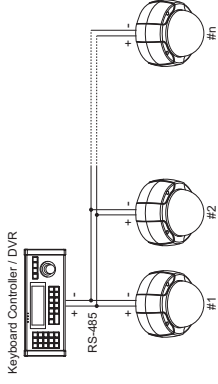


Video Connection

- Connect with BNC coaxial cable.

Alarm Input Connection

- Sensor Input

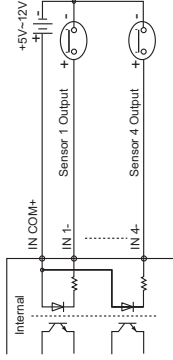

Before connecting sensors, check driving voltage and output signal type of the sensor. Since output signal types of the sensors are divided into Open Collector and Voltage Output type in general, the cabling must be done properly after considering these typed.

Signal	Description
IN COM+	Connect (+) cable of electric power source for Sensors to this port as shown in the circuit above.
IN1 , IN2 , IN3 , IN4	Connect output of sensors for each port as shown in the circuit above.

If you want to use Alarm Input, the types of sensor must be selected in OSD menu. The sensor types are Normal Open and Normal. If sensor type is not selected properly, the alarm can be activated reversely.

Normal Open	Output Voltage is high state when sensor is activated
Normal Close	Output Voltage is high state when sensor is not activated

Check points before operation

- Before power is applied, please check the cables carefully.
- The camera ID of the controller must be identical to that of the target camera. The camera ID can be checked by reading DIP switch of the camera.
- If your controller supports multi-protocols, the protocol must be changed to match to that of the camera.
- If you changed camera protocol by changing DIP switch, the change will be effective after you reboot the camera.
- Since the operation method can be different for each controller available, refer to the manual for your controller if camera can not be controlled properly. The operation of this manual is based on the standard Pelco® Controller.

Preset and Pattern Function Pre-Check

- Check how to operate preset and pattern function with controller or DVR in advance to operate camera function fully when using controller or DVR.
- Refer to the following table when using standard Pelco® protocol controller.

Go Preset	Input [Preset Number] and press [Preset] button shortly.
Set Preset	Input [Preset Number] and press [Preset] button for more than 2 seconds.
Run Pattern	Input [Pattern Number] and press [Pattern] button shortly.
Set Pattern	Input [Pattern Number] and press [Pattern] button for more than 2 seconds.

- If controller or DVR has no pattern button or function, use shortcut keys with preset numbers. For more information, refer to "Reserved Preset" in this manual.

Starting OSD Menu

- **Function**
 - Using the OSD menu, Preset, Pattern, Swing, Group and Alarm Input function can be configured for each application.
- **Enter Menu**
 - <Go Preset> [95]

Reserved Preset


- **Description**
 - Some Preset numbers are reserved to special functions.
- **Description**
 - <Go Preset> [95] : Enters into OSD menu
 - <Go Preset> [131~134] : Runs Pattern Function 1 ~ 4
 - <Go Preset> [141~148] : Runs Swing Function 1 ~ 8
 - <Go Preset> [151~158] : Runs Group Function 1 ~ 8
 - <Go Preset> [161~162] : Sets Relay Output 1 ~ 2 to OFF
 - <Set Preset> [161~162] : Sets Relay Output 1 ~ 2 to ON
 - <Go Preset> [170] : Sets Camera BLC Mode to OFF
 - <Go Preset> [171] : Sets Camera BLC Mode to ON
 - <Go Preset> [174] : Sets Camera Focus Mode to AUTO
 - <Go Preset> [175] : Sets Camera Focus Mode to Manual
 - <Go Preset> [176] : Sets Camera Focus Mode to SEMI-AUTO
 - <Go Preset> [177] : Sets Day & Night Mode to AUTO
 - <Go Preset> [178] : Sets Day & Night Mode to NIGHT
 - <Go Preset> [179] : Sets Day & Night Mode to DAY
 - <Go Preset> [190] : Sets OSD Display Mode to AUTO (Except Privacy Mask)
 - <Go Preset> [191] : Sets OSD Display Mode to OFF (Except Privacy Mask)
 - <Go Preset> [192] : Setting OSD Display Mode to ON (Except Privacy Mask)
 - <Go Preset> [193] : Sets all Privacy Mask Display to OFF
 - <Go Preset> [194] : Sets all Privacy Mask Display to ON

Preset

- **Function**
 - Max. 127 positions can be stored as Preset position. The Preset number can be assigned from 1 to 128, but 95 is reserved for starting OSD menu. Camera characteristics (ie. White Balance, Auto Exposure) can be set up independently for each preset. Label should be blank and "Camera Adjust" should be set to "GLOBAL" as default. All characteristics can be set up in OSD menu.
- **Set Preset**
 - <Set Preset> [1~128]
- **Run Preset**
 - <Go Preset> [1~128]
- **Delete Preset**
 - To delete Preset, use OSD menu.

Swing

- **Function**
 - By using Swing function, you can make camera to move between 2 Preset positions repeatedly. When swing function runs, camera moves from the preset assigned as the 1st point to the preset assigned as the 2nd point in CW(Clockwise) direction. Then camera moves from the preset assigned as the 2nd point to the preset assigned as the 1st point in CCW(Counterclockwise) direction.




In case that the preset assigned as the 1st point is same as the preset assigned as the 2nd point, camera turns on its axis by 360° in CW(Clockwise) direction and then it turns on its axis by 360° in CCW(Counterclockwise) direction.
Speed can be set up from 1°/sec to 180°/sec.

- **Set Swing**
 - To set Swing, use OSD menu.
- **Run Swing**
 - Method 1) <Run Pattern> [Swing NO.+10] ex) Run Swing 3 : <Run Pattern> [13]
 - Method 2) <Go Preset> [Swing NO.+140] ex) Run Swing 3 : <Go Preset> [143]
- **Delete Swing**
 - To delete Swing, use OSD menu.

Pattern


- **Function**
 - Pattern Function is that a camera memorizes the path (mostly curve path) by joystick of controller for assigned time and revives the path exactly as it memorized. 4 Patterns are available and Maximum 1200 communication commands can be stored in a pattern.
- **Set Pattern**
 - Pattern can be created by one of following two methods.
Method 1) <Set Pattern> [Pattern NO.]
 - ▶ Pattern editing screen is displayed as bellow.



- ▶ Movement by Joystick and preset movement can be memorized in a pattern.
- ▶ The rest memory size is displayed in progress bar.
- ▶ To save the recording, press NEAR key and to cancel, press FAR key.
- Method 2) OSD Using OSD Menu: See the section "How to use OSD Menu".
- **Run Pattern**
 - Method 1) <Run Pattern> [Pattern NO.] ex) Run Pattern 2 : <Run Pattern> [2]
 - Method 2) <Go Preset> [Pattern NO.+130] ex) Run Pattern 2: <Go Preset> [132]
- **Delete Pattern**
 - Use OSD menu to delete a Pattern.

Group

- **Function**
 - The group function allows running sequence of Presets, Pattern and/or Swings. Max 8 group can be stored. Each group can have max 20 action entities which can be preset, pattern or swing. Preset speed can be set up and the repeat number of Pattern & Swing can be set up in Group setup. Dwell time between actions can be set up also.




- **Set Preset**
 - Use OSD Menu to create a Group.
- **Run Preset**
 - Method 1) <Run Pattern> [Group NO.+20] ex) Run Group 7 : <Run Pattern> [27]
 - Method 2) <Go Preset> [Group NO.++150] ex) Run Group 7 : <Go Preset> [157]
- **Delete Preset**
 - Use OSD Menu to delete.

Other Functions

- **Power Up Action**
 - This function enables to resume the last action executed before power down. Most of actions such as Preset, Pattern, Swing and Group are available for this function but Jog actions are not available to resume.
- **Auto Flip**
 - In case that tilt angle arrives at the top of tilt orbit (90°), zoom module camera keep moving to opposite tilt direction (180°) to keep tracing targets. As soon as zoom module camera passes through the top of tilt direction(90°), images should be reversed automatically and  appears in screen. If this function is set to OFF, tilt movement range is 0 ~ 95°.
- **Parking Action**
 - This function enables to locate the camera to specific position automatically if operator doesn't operate the controller for a while. The Park Time can be defined as an interval from 1 minute to 4 hours.
- **Alarm Input**
 - 4 Alarm Inputs are used. If an external sensor is activated, camera can be set to move to corresponding preset position. It is noted that the latest alarm input is effective if multiple sensors are activated.
- **Privacy Zone Mask**
 - To protect privacy, MAX. 4 Privacy Masks can be created on the arbitrary position to hide objects such as windows, shops or private house. With Spherical Coordinates system, powerful Privacy Zone Mask function is possible.
- **GLOBAL / LOCAL Image Setup**
 - WB(White Balance) and AE(Auto Exposure) can be set up independently for each preset. There are 2 modes, "Global" mode & "Local" mode. The Global mode means that WB or AE can be set up totally and simultaneously for all presets in "ZOOM CAMERA SETUP" menu. The Local mode means that WB or AE can be set up independently or separately for each preset in each preset setup menu. Each Local WB/AE value should activate correspondingly when camera arrives at each preset location. During jog operation, Global WB/AE value should be applied. All Local WB/AE value do not change although Global WB/AE value changes.
- **Semi Auto Focus**
 - This mode exchanges focus mode automatically between Manual Focus mode and Auto Focus mode by operation. Manual Focus mode activates in preset operation and Auto Focus mode activates during jog operation. With Manual mode at presets, Focus data is memorized in each preset in advance and camera calls focus data in correspondence with presets as soon as camera arrives at a preset. It should shorten time to get focuses. Focus mode changes to Auto Focus mode automatically when jog operation starts.

OSD Display of Main Screen

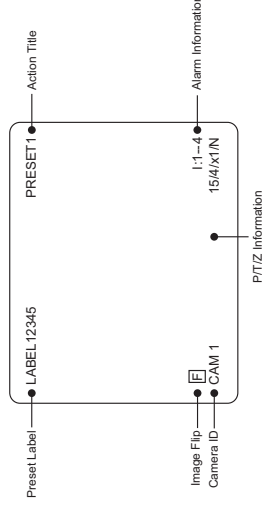


- **P/T/Z Information**
 - Current Pan/Tilt angle in degree, zoom magnification and a compass direction.
- **Camera ID**
 - Current Camera ID(Address).
- **Action Title**
 - Followings are possible Action Titles and their meaning.
"SET PRESET xxx" When Preset xxx is stored
"PRESET xxx" When camera reach to Preset xxx
"PATTERN x" When Pattern x is in action
"SWG x/PRESET xxx" When Swing x is in action
"UNDEFINED" When undefined function is called to run
• The Label stored for specific Preset.
- **Preset Label**
 - This information shows current state of Alarm Input. If an Input point is **ON** state it will show a number corresponding to each point. If an Input point is **OFF** state, '-' will be displayed.
Ex) Point 2 & 3 of inputs are **ON**, OSD will show as below
- **Image Flip**
 - Shows that images are currently reversed by Auto Flip Function.

1:-23-

General Rules of Key Operation for Menu


- The menu items surrounded with () always has its sub menu.
- For all menu level, to go into sub menu, press **NEAR** key.
- To go to up-one-level menu, press **FAR** key.
- To move from items to item in the menu, use joystick in the **Up/Down** or **Left/Right**.
- To change a value of an item, use **Up/Down** of the joystick in the controller.
- Press **NEAR** key to save values and Press **FAR** key to cancel values.

Main Menu



- **System Information**
 - Displays system information and configuration.
- **Display Setup**
 - Enable/Disable of OSD display on Main Screen.
- **Dome Camera Setup**
 - Configure various functions of this camera.
- **System Initialize**
 - Initializes system configuration and sets all data to factory default configuration.


Display Setup



This menu defines Enable/Disable of OSD display on Main Screen. If an item is set to be **AUTO**, the item is displayed only when the value of it is changed.


- **Camera ID** [ON/OFF]
- **PTZ Information** [ON/OFF/AUTO]
- **Action Title** [ON/OFF/AUTO]
- **Preset Label** [ON/OFF/AUTO]
- **Alarm Input** [ON/OFF/AUTO]

Compass Direction Setup



Set North to assign compass direction as criteria. Move camera and press **NEAR** button to save.

PRIVACY ZONE MASK Setup



Select area in image to mask.

● Mask No [1~4]

Select Mask number. If the selected mask has already data, camera moves as it was set. Otherwise, "UNDEFINED" will be displayed under "Mask NO".


● Display [ON/OFF]

Sets if camera makes mask shows or not on images.

● Display [CANCEL/OK]


Deletes data in the selected mask NO.

Privacy Zone Area Setup



Move camera to area to mask. Then the menu to adjust mask size will be displayed.

Privacy Zone Size Adjustment




Adjust mask size. Use joystick or arrow buttons to adjust mask size.

● ◀ ▶ (Left/Right) Adjusts mask width.

● ▲ ▼ (Up/Down) Adjusts mask height.

CAMERA Setup



Setup the general functions of zoom camera module.

● Focus Mode

[AUTO/MANUAL/SEMI-AUTO]
Sets camera focus mode.

▶ SEMI-AUTO Mode

This mode exchanges focus mode automatically between Manual Focus mode and Auto Focus mode. Manual Focus mode activates in preset operation and Auto Focus mode activates when jog operation starts. With Manual mode at presets, Focus data is memorized in each preset in advance and camera calls focus data in correspondence with presets as soon as camera arrives at a preset.


● Digital Zoom

[ON/OFF]
Sets digital zoom function to ON/OFF. If this is set to OFF, optical zoom function runs but zoom function stops at the end of optical zoom magnification.

● Line Lock

[ON/OFF]
If Line lock sync is ON, video signal is synchronized with AC power. Video can be fluctuated after setting is changed.

White Balance Setup



● Focus Mode

[AUTO/MANUAL]
In Manual mode, Red and Blue level can be set up manually

● Red Adjust [10~60]

● Blue Adjust [10~60]

Auto Exposure Setup

```

AE SETUP - GLOBAL
-----
-> BACKLIGHT  OFF
DAY/NIGHT    AUTO1
IRIS          AUTO
SHUTTER       ESC
AGC           NORMAL
SSNR          NORMAL
SENS-UP       <AUTO>
BACK          EXIT
    
```

● Backlight

[ON/OFF]

Sets Backlight Compensation

[AUTO1/AUTO2/DAY/NIGHT]

AUTO1 exchanges Day/Night mode faster than AUTO2.

[0~100]

● Brightness

Adjusts brightness of images. Iris, Shutter Speed and Gain are adjusted automatically in correspondence with this value.

[AUTO/MANUAL(0~100)]

If Iris is set to Auto, Iris should have highest priority in adjusting AE and Shutter Speed should be fixed.

If Iris is set to Manual, Iris should be fixed and Iris has lower priority in adjusting AE, in comparison with others.

● IRIS

● Shutter Speed

[ESC/A Flicker/Manual(x128~1/20000 sec)]

If Iris is set to Manual and Shutter Speed is set to ESC, Shutter Speed should have highest priority. If Shutter Speed is set to A.Flicker, to remove Flicker, Shutter Speed should be set to 1/100 sec. for NTSC and 1/120 for PAL.

● AGC

[OFF/NORMAL/HIGH]

Enhances image brightness automatically in case that luminance level of image signal is too low.

● SSNR

[OFF/LOW/MIDDLE/HIGH]

Enhances images by deducting noises when gain level of images is too high.

● SENS-UP

[AUTO(2~128)/OFF]

Activates Slow Shutter function when luminance of image (signal) is too dark. It is possible to set up the maximum number of frames piled up one on another by Slow Shutter function.

Motion Setup

```

MOTION SETUP
-----
-> MOTION LOCK  OFF
POWER UP ACTION ON
JOG MAX SPEED 120/SEC
JOG DIRECTION INVERSE
<PARKING ACTION SETUP>
<ALARM INPUT SETUP>
BACK          EXIT
    
```

Setup the general functions of Pan/Tilt motions.

● Motion Lock

[ON/OFF]

If Motion Lock is set to ON, it is impossible to set up and delete Preset, Swing, Pattern and Group. It is possible only to run those functions. To set up and delete those functions, enter into OSD menu.

● Power Up Action

[ON/OFF]

Refer to "Other Functions" section.

● Auto Flip

[ON/OFF]

Refer to "Other Functions" section.

● Jog Max Speed

[1"/sec ~360"/sec]

Sets maximum jog speed. Jog speed is inversely proportional to zoom magnification. As zoom magnification goes up, pan/tilt speed goes down.

● Jog Direction

[INVERSE/NORMAL]

If you set this to 'Inverse', the view in the screen is moving same direction with jog tilting. If 'Normal' is selected, the view in the screen is moving reversely.

● Freeze in Preset

[ON/OFF]

At start point of preset movement, camera starts freezing the image of start point. Camera keeps displaying the image of start point during preset movement and does not display the images which camera gets during preset movement. As soon as camera stops at preset end point, camera starts displaying live images which it gets at preset end point.

This function availability should be different by models.

Parking Action Setup

```

PARKING ACTION SETUP
->PARK ENABLE  OFF
WAIT TIME 00:10:00
PARK ACTION HOME
BACK
EXIT
    
```

If Park Enable is set to ON, camera runs assigned function automatically if there is no PTZ command during assigned "Wait Time".

● **Park Enable** [ON/OFF]

● **Wait Time** [1 minute ~ 4 hour]

The time is displayed with "hh:mm:ss" format and you can change this by 1 min unit.

● **Park Action** [HOME/PRESET/PATTERN/SWING /GROUP]

► HOME

Camera moves to home position if there is no PTZ command during assigned "Wait Time".

Alarm Input Setup

```

ALARM INPUT SETUP
->ALARM1 TYPE  N.OPEN
ALARM2 TYPE  N.OPEN
ALARM3 TYPE  N.OPEN
ALARM4 TYPE  N.OPEN
ALARM1 ACT   NOT USED
ALARM2 ACT   NOT USED
ALARM3 ACT   NOT USED
ALARM4 ACT   NOT USED
BACK
EXIT
    
```

Match the Alarm sensor input to one of Preset positions. If an external sensor is activated, camera will move to corresponding preset position when this item is predefined.

● **Alarm x Type** [Normal OPEN/Normal CLOSE]

● **Alarm x Action** [NOT USED/PRESET 1~128]
Assign counteraction Preset position to each Alarm input.

PRESET Setup

```

PRESET SETUP
->PRESET NO.  1
CLR PRESET  CANCEL
<EDIT SCENE> LABEL123
<EDIT LABEL> GLOBAL
CAM ADJUST
BACK
EXIT
    
```

● **Preset Number** [1~128]

If a selected preset is already defined, camera moves to pre-defined position and preset characteristics such as Label and Relay Outputs show on monitor. If a selected preset is not defined, "UNDEFINED" shows on monitor.

● **Clear Preset** [CANCEL/OK]

Delete current Preset data

● **Edit Preset Scene**
Redefine current Preset scene position (i.e. PTZ).

● **Edit Preset Label**
Edits Label to show on monitor when preset runs. MAX. 10 alphabets are allowed.

● **CAM Adjust** [GLOBAL/LOCAL]

WB(White Balance) and AE(Auto Exposure) can be set up independently for each preset. There are 2 modes, "Global" mode & "Local" mode. The Global mode means that WB or AE can be set up totally and simultaneously for all presets in "ZOOM CAMERA SETUP" menu.

up independently or separately for each preset in each preset setup menu. Each Local WB/AE value should activate correspondingly when camera arrives at each preset location. During jog operation, Global WB/AE value should be applied.

All Local WB/AE value should not change although Global WB/AE value changes. If "Local" is selected, Menu to set WB/AE shows on monitor.

Pattern Setup

PATTERN SETUP
→ PATTERN NO. 1 UNDEFINED
CLR PATTERN CANCEL
← EDIT PATTERNS
BACK
EXIT

- **Pattern Number** [1~4]
Selects Pattern number to edit.
If a selected pattern number is not defined, "UNDEFINED" will be displayed under selected pattern number.
- **Clear Pattern** [CANCEL/OK]
Deletes data in current pattern.
- **Edit Pattern**
Starts editing pattern.

Edit Pattern

EDIT PATTERN 1
MOVE TO START POSITION
[NEAR: START / FAR: CANCEL]

- ① By using Joystick, move to start position with appropriate zoom. To start pattern recording, press **NEAR** key. To exit this menu, press **FAR** key.

EDIT PATTERN 1
[NEAR: SAVE / FAR: DELETE]
0/0/X1/N

- ② Move camera with joystick of controller or run preset function to memorize the path (mostly curve path) in a selected pattern. The total memory size and the rest memory size is displayed in the form of bar. Maximum 1200 communication commands can be stored in a pattern.
- ③ To save data and exit, press **NEAR** key. To cancel recording and delete record data, press **FAR** key.

Group Setup

GROUP SETUP
→ GROUP NO. 1 UNDEFINED
CLEAR GROUP CANCEL
← EDIT GROUP
BACK
EXIT

- **Group Number** [1~8]
Selects Group number to edit.
If a selected Group number is not defined, "UNDEFINED" will be displayed under selected Group number.
- **Clear Group** [CANCEL/OK]
Deletes data in current Group.
- **Edit Group**
Starts editing Group.

Edit Pattern

EDIT GROUP 1
→ NO ACTION ### DWELL OPT
1 NONE
2 NONE
3 NONE
4 NONE
5 NONE
SAVE
CANCEL [NEAR: EDIT]

- ① Press Near key in "NO" list to start Group setup.

EDIT GROUP 1
NO ACTION ### DWELL OPT
→ 1 NONE
2 NONE
3 NONE
4 NONE
5 NONE
SAVE [NEAR: EDIT ACT]
CANCEL [FAR: EDIT END]

- ② Note that MAX. 20 Functions are allowed in a Group. Move cursor up/down and press Near key to set up.

- ③ Set up Action, Dwell time and Option. Note that selected item is displayed in reverse. Move cursor **Left/Right** to select items and move cursor **Up/Down** to change each value.

EDIT GROUP 1
NO ACTION ### DWELL OPT
→ 1 NONE
2 NONE
3 NONE
4 NONE
5 NONE
SAVE [↔: MOVE CURSOR]
CANCEL [↵: CHANGE VAL.]

- **Action ###** [NONE/PRESET/SWING/PATTERN]
- **DWELL** [0 second ~ 4 minutes]
Sets Dwell Time between functions
- **OPT**
Option. It should be preset speed when preset is set in Action. It should be the number of repeat when Pattern or Swing is selected in Action

EDIT GROUP 1

NO ACTION ### DWELL OPT

1 PRESET 1 00:03 360

2 NONE

3 NONE

4 NONE

5 NONE

SAVE [NEAR: EDIT ACT]

CANCEL [PAR: EDIT END]

④ Set up items such as Action, ###, Dwell and OPT.

EDIT GROUP 1

NO ACTION ### DWELL OPT

→ 1 PRESET 1 00:03 360

2 NONE

3 NONE

4 NONE

5 NONE

SAVE [NEAR: EDIT ACT]

CANCEL [PAR: EDIT END]

⑤ After finishing setting up a Action, press Near key to one-upper-level menu(Step ②). Move cursor Up/Down to select Action number and repeat Step ② ~ Step ④ to edit selected Group.

EDIT GROUP 1

NO ACTION ### DWELL OPT

1 PRESET 1 00:03 360

2 NONE

3 NONE

4 NONE

5 NONE

→SAVE

CANCEL

⑥ After finishing setting up all Actions, press FAR key to exit. Then cursor should be moved to "SAVE". Press Near key to save data.

System Initialize

SYSTEM INITIALIZE

→CLR ALL DATA

•CLR DISPLAY SET

•CLR MOTION SET

•CLR EDIT DATA

REBOOT SYSTEM

BACK

EXIT

- **Clear All Data** Deletes all configuration data such as display, camera, motion setup and so on.
- **Clear Display Set** Initializes Display Configuration
- **Clear Camera Set** Initializes Camera Configuration
- **Clear Motion Set** Initializes Motion Configuration
- **Clear Edit Data** Deletes Preset Data, Swing Data, Pattern Data and Group Data
- **Reboot Camera** Reboots Zoom Camera module
- **Reboot System** Reboots Speed Dome Camera

Initial Configuration Table

● Display Configuration		● Camera Configuration	
Camera ID	ON	Focus Mode	SemiAuto
PTZ Information	AUTO	Digital Zoom	ON
Action Title	AUTO	Line Lock	OFF
Preset Label	AUTO	White Balance	AUTO
Alarm Input	AUTO	Backlight	OFF
North Direction	Pan 0°	Day&Night	AUTO1
Privacy Zone	Undefined	Brightness	25
● Motion Configuration		Iris	AUTO
Motion Lock	OFF	Shutter	ESC
Power Up Action	ON	AGC	NORMAL
Auto Flip	ON	SSNR	MIDDLE
Jog Max Speed	120 /sec	SENS-UP	AUTO (4 Frame)
Jog Direction	INVERSE	● User Edit Data	
Freeze In Preset	OFF	Preset 1~128	Undefined
Park Action	OFF	Swing 1~8	Undefined
Alarm Action	OFF	Pattern 1~4	Undefined
		Group 1~8	Undefined

SPECIFICATIONS

Specifications


Model	x10	
Video Signal System	NTSC	PAL
CCD	1/4" Interline Transfer CCD	
Max. Pixels	811(H)x598(V) 410K	795(H)x596(V) 470K
Effective Pixels	768(H)x494(V) 390K	752(H)x582(V) 440K
Horizontal Res.	500 TV Line(Color), 570 TV Line(BW)	
SN Ratio	50 dB (AGC Off)	
Zoom	x10 Optical Zoom, x10 Digital Zoom	
Focal length	F1.8, F=3.8~38mm	
Min. illumination	0.7 Lux (Color) / 0.02 Lux (BW), 50 IRE	
Day & Night	Auto / Day / Night(ICR)	
Focus	Auto / Manual / SemiAuto	
Iris	Auto / Manual	
Shutter Speed	x128 ~ 1/120000 sec	
AGC	Normal / High / Off	
White Balance	Auto / Manual(Red, Blue Gain Adjustable)	
BLC	Low / Middle / High / Off	
Flickerless	Selectable	
SSNR	Low / Middle / High / Off	
Range	Pan : 360° (Endless)	
	Tilt : 180° (Auto-Flip), 95° (Normal)	
	Preset : 360°/sec	
Pan/Tilt Speed	Manual : 0.05 ~ 360°/sec (proportional to zoom)	
	Swing : 1~ 180°/sec	
Preset	127 Preset (Label, Camera Image Setting)	
Pattern	4 Pattern, 1200 commands(about 5 minute)/Pattern	
Swing	8 Swing	
Group	8 Group (20 action entities per Group)	
Other Functions	Auto Flip, Auto Parking, Power Up Action etc.	
Communication	RS-485	
Protocol	Pelco-D, Pelco-P selectable	
Privacy Zone	4 Zone	
Alarm Input	4 Input	
OSD	Menu / PTZ information etc	
	DC Type : DC 12V / 0.8A	
Rated Power*	AC Type : AC 24V / 0.4A	
	Dome : Ø115	
Dimension	Housing : Ø147.5 x 141(H) mm	
Weight	about 1 Kg	
Operating Temp.	0 °C ~ 40 °C	

* Check the voltage and current capacity of rated power carefully.


SPECIFICATIONS

Dimension

- Main Unit & Surface Mount Bracket

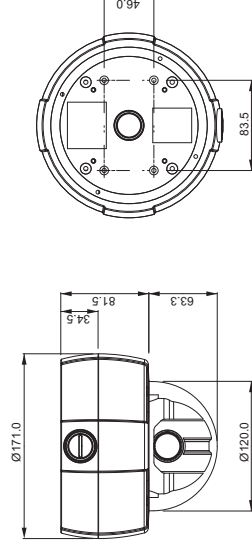

- Wall Mount Bracket

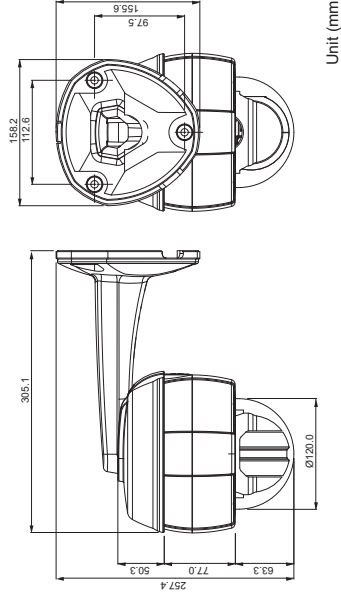

■ MEMO