

How-to Note: *How-To Enable Smart ICRSS Alarms*

[This note applies to Smart ICRSS]
[5-May-16]



Contents

Overview	1
Materials needed	1
The Software Interface	2


Overview

This How-To will go over setting up notifications in Smart ICRSS that will pop up on screen and play a sound to notify you when an event happens (Alarms). This will cover setting up motion alarms, linking the alarm to a video pop-up, and setting the schedule for these alarms.


Materials needed

Windows 7 or better for PC
Mac OS 10.7 or better


The Software Interface

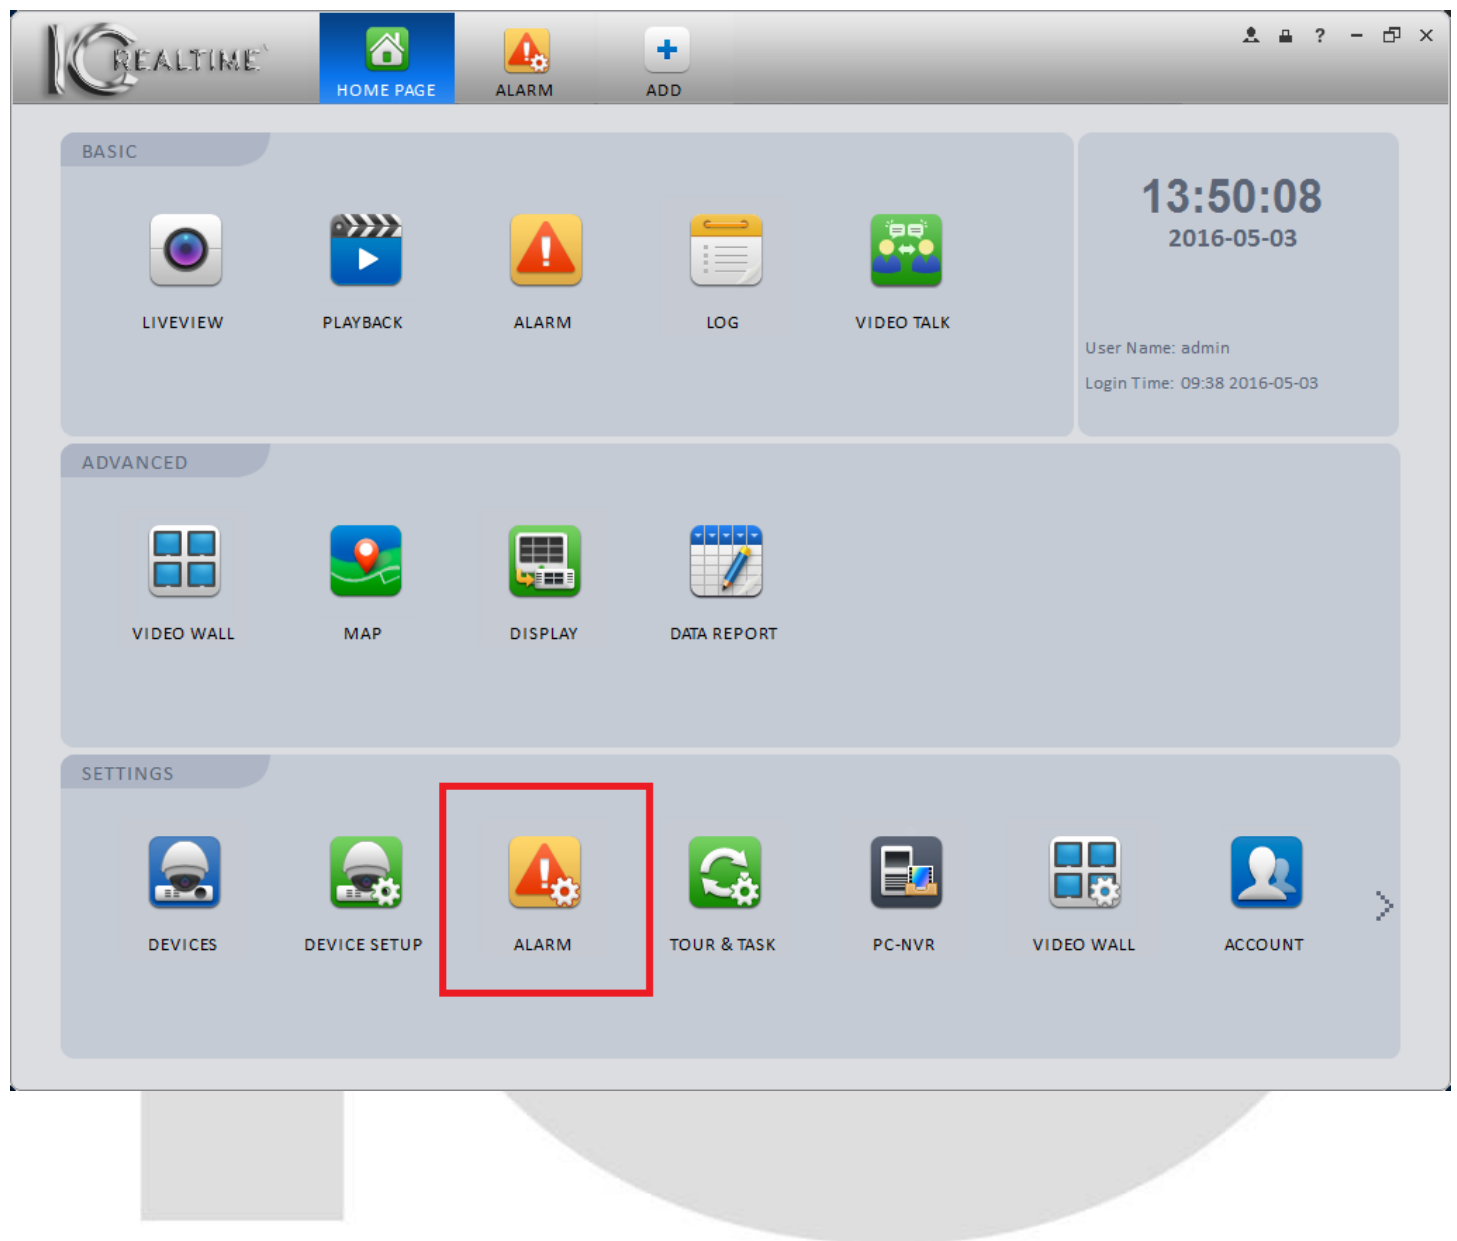

Step 1: Click here to enter the Alarm menu. Here you can control which alarms are enabled and setting alarms up.

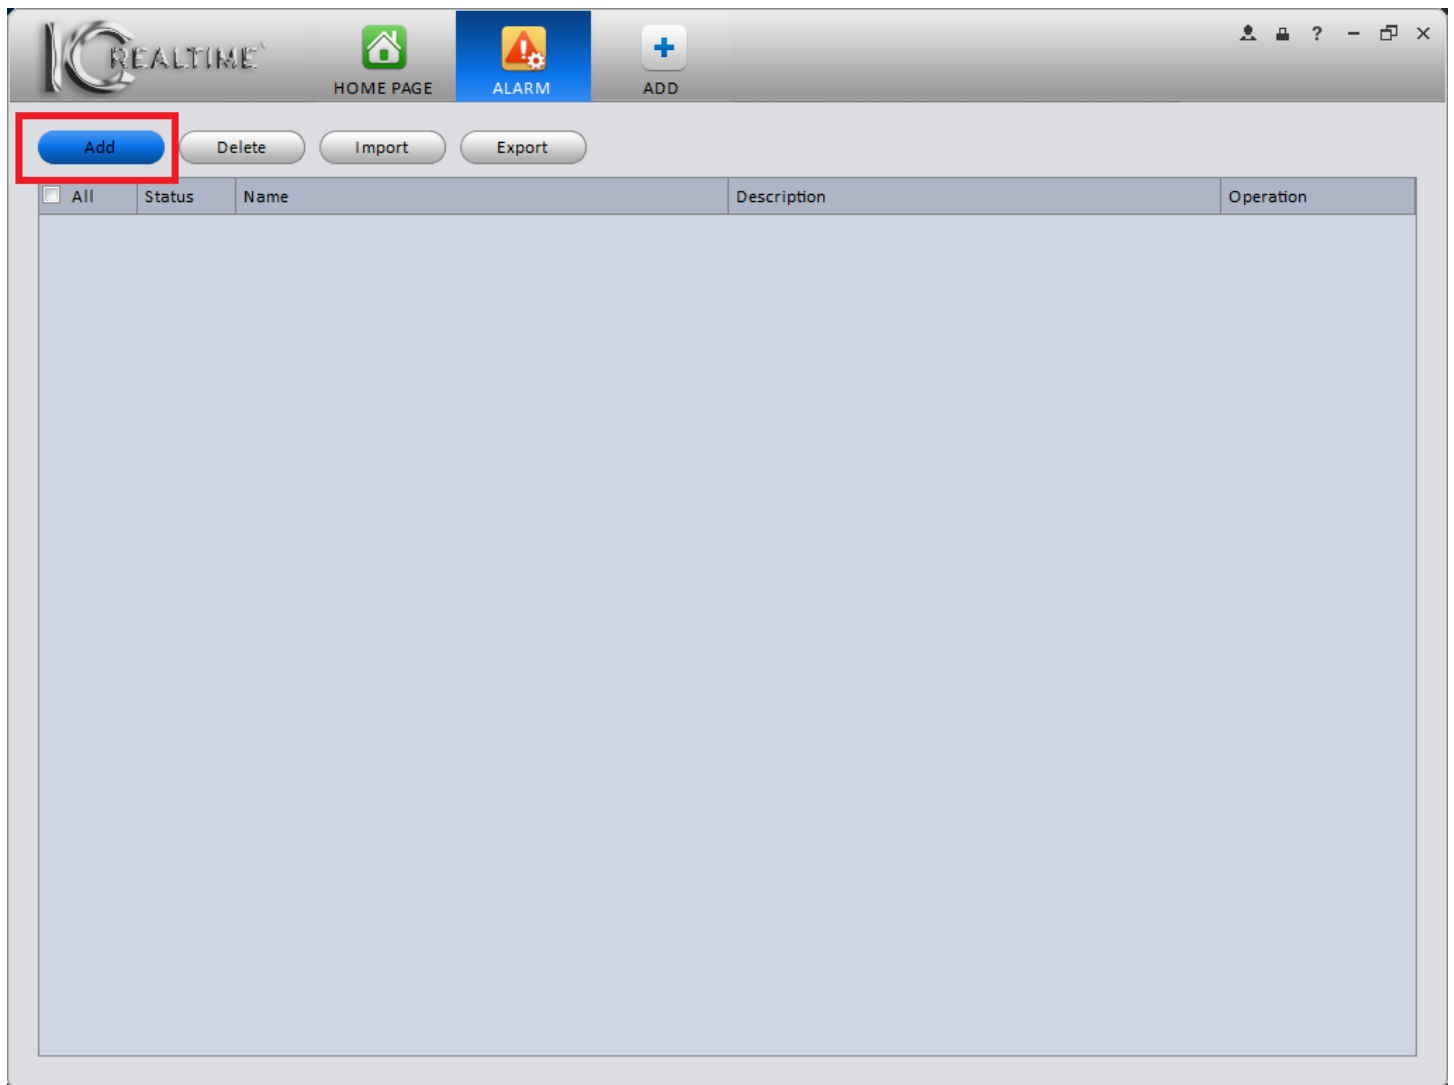


Step 2: *Click on Add to start the set up process for your software based first alarm.*

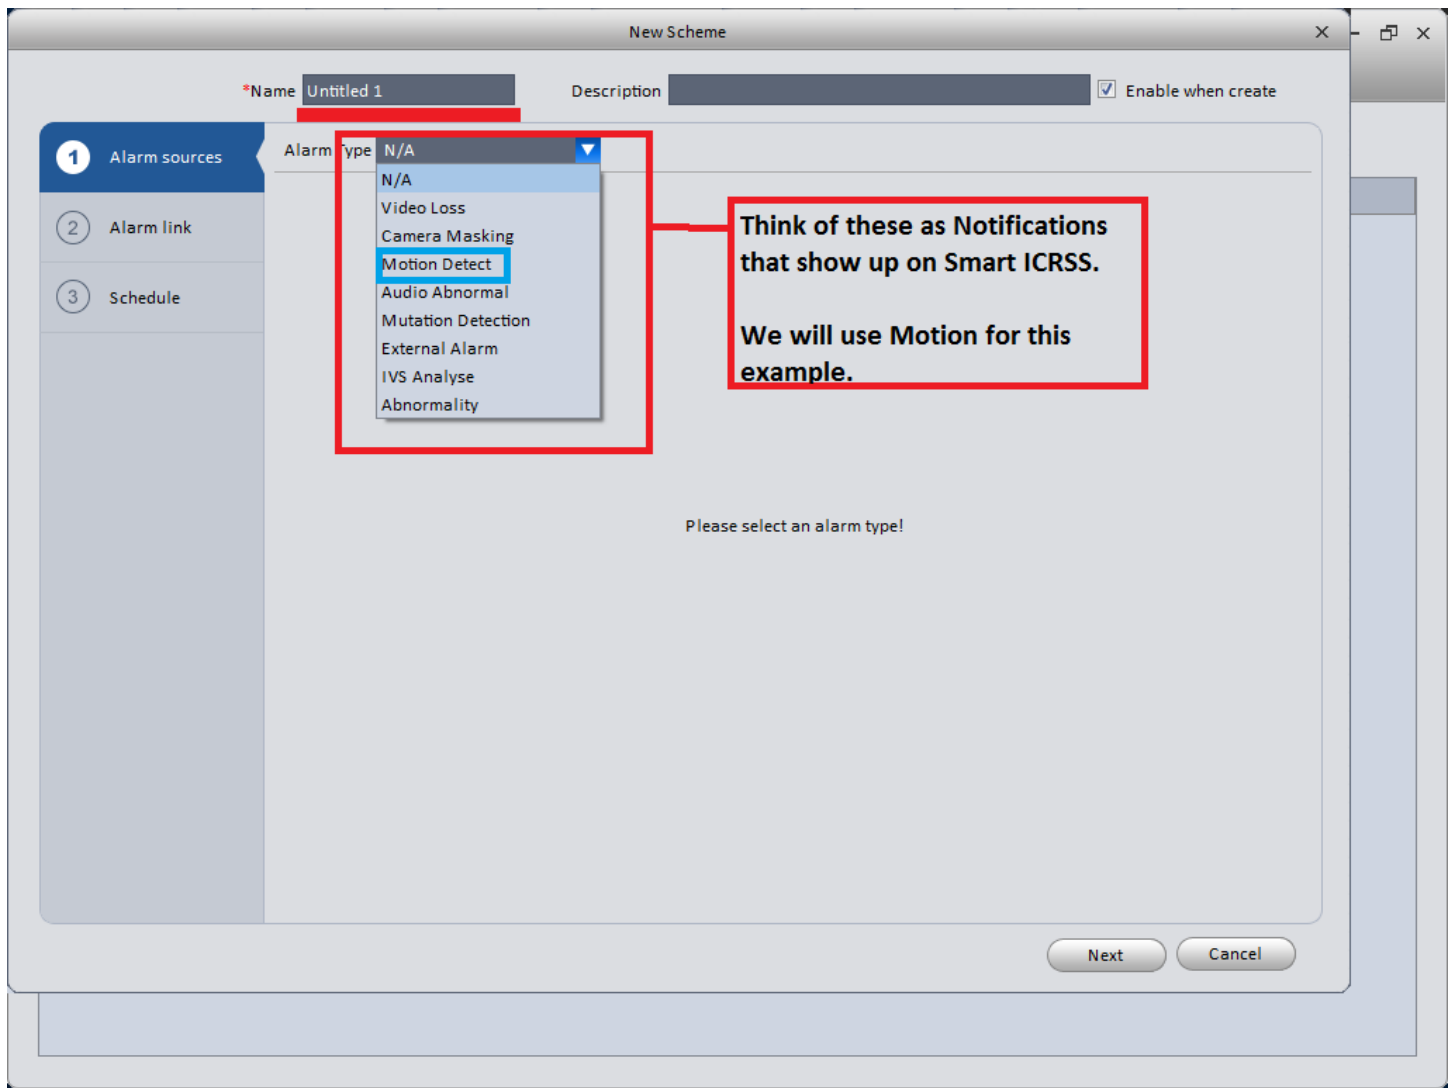


Step 3:

Alarm Source. First things first, make sure you name this something that is easy to understand. Once you have done that, select the type of alarm notification that you would like. Here I chose a motion alarm. Once you select your alarm type you will get more options to fill out.

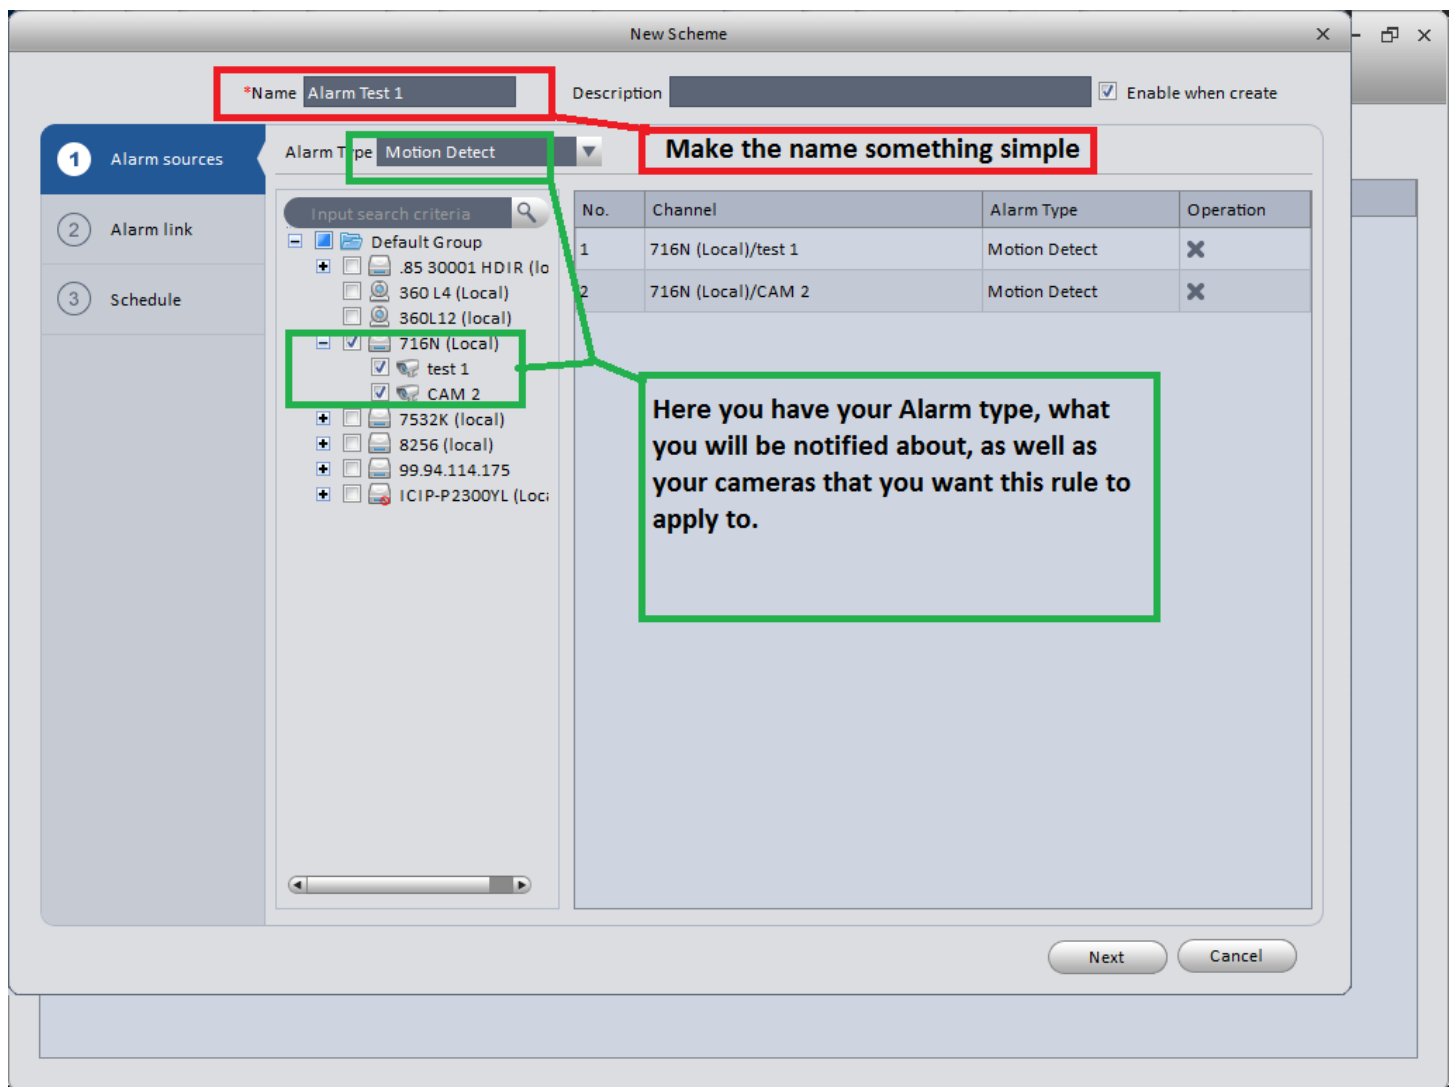


Step 4:

Once you have named your alarm and also selected the alarm type, these are the options that will appear. Here you can select from your device list which items will be the source of the alarm that triggers inside smart icrss.

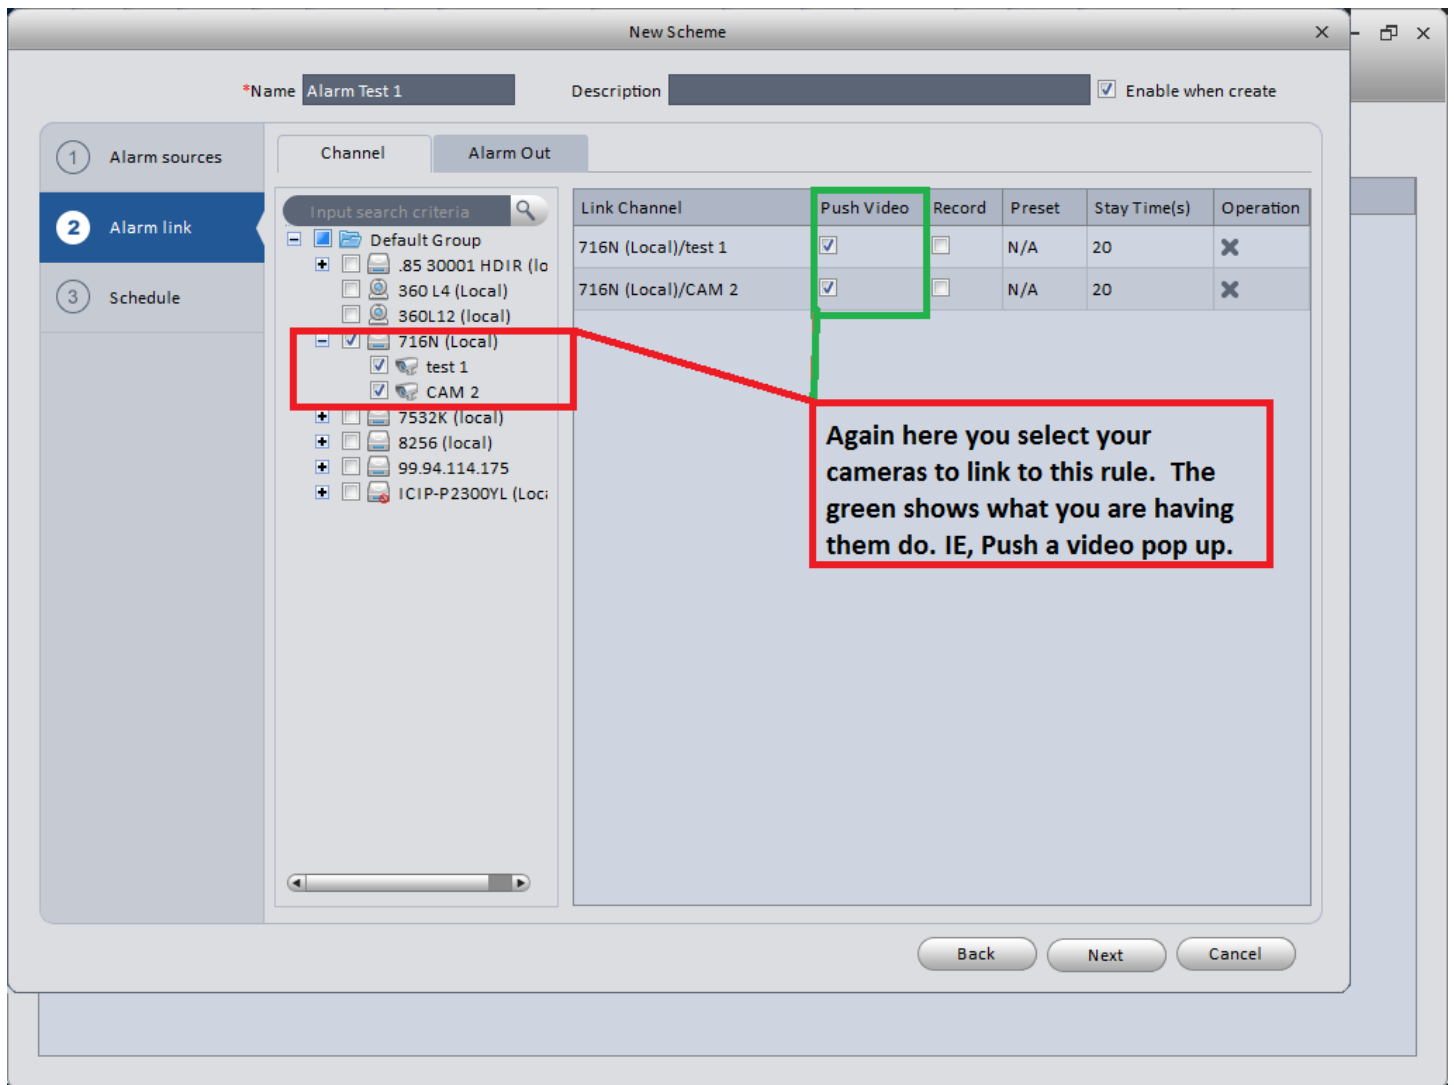


Step 5:

In Alarm Link you will be selecting the cameras that are connected to the triggering cameras. Example, you can have the front door camera trigger, a motion even that brings up all entrance cameras. Here I simply have two cameras set to pop up with video feed when there is motion detected.

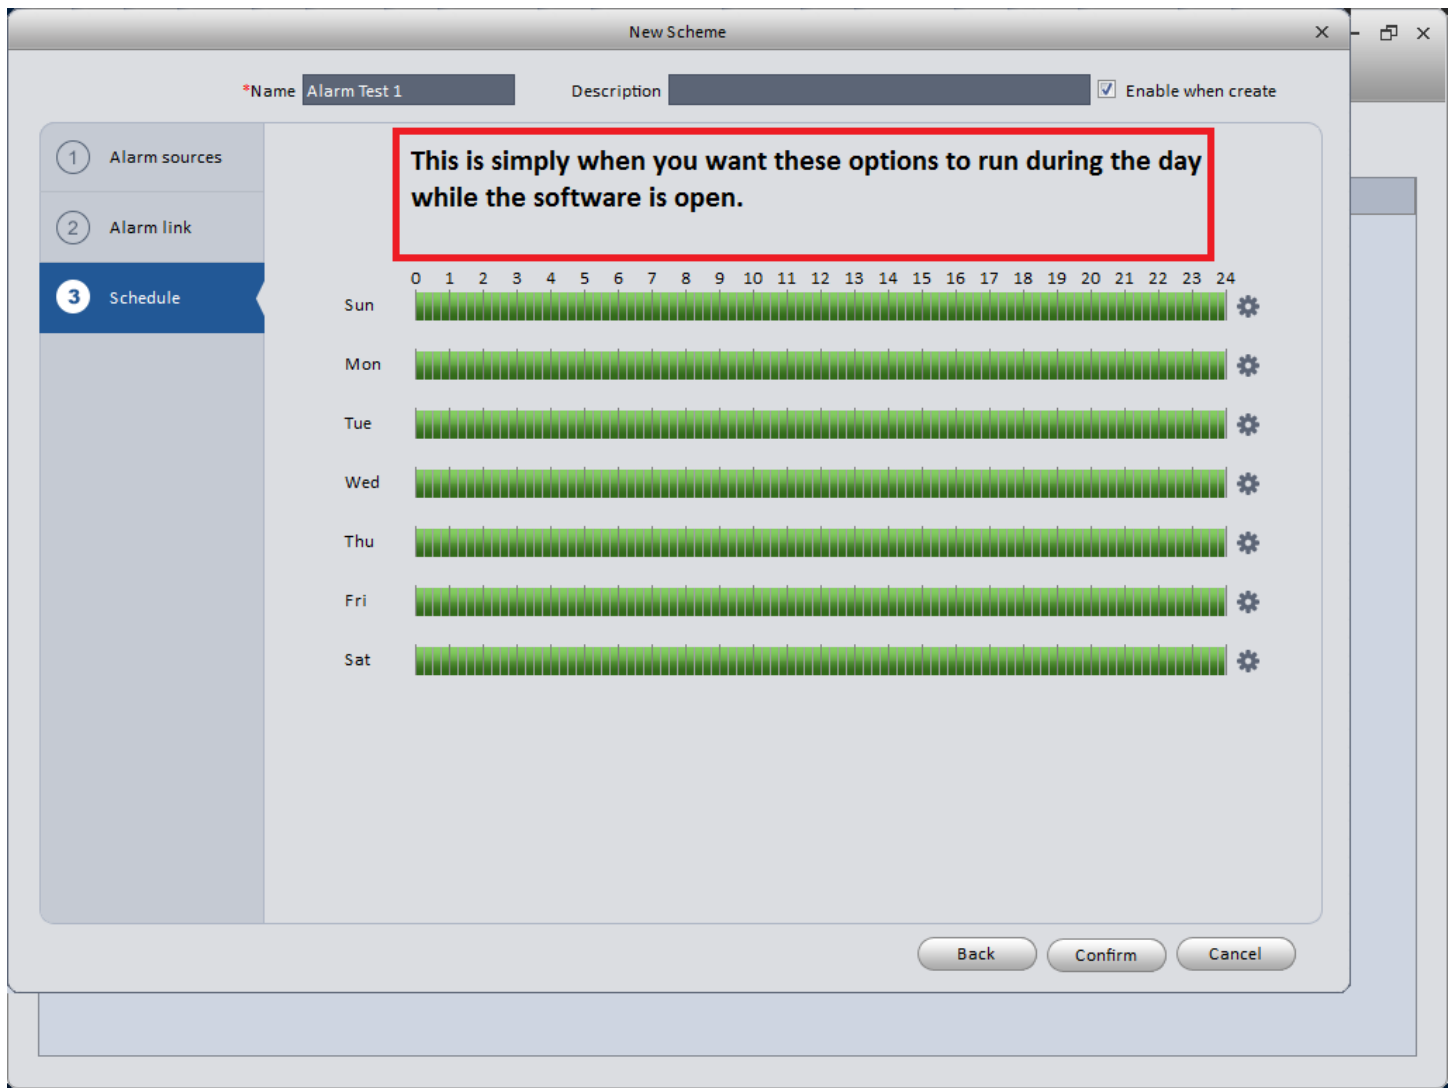


Step 6:

Very similar to our Schedule menu in our NVR's and DVR's, you can customize the time period that you would like this Alarm to be active.

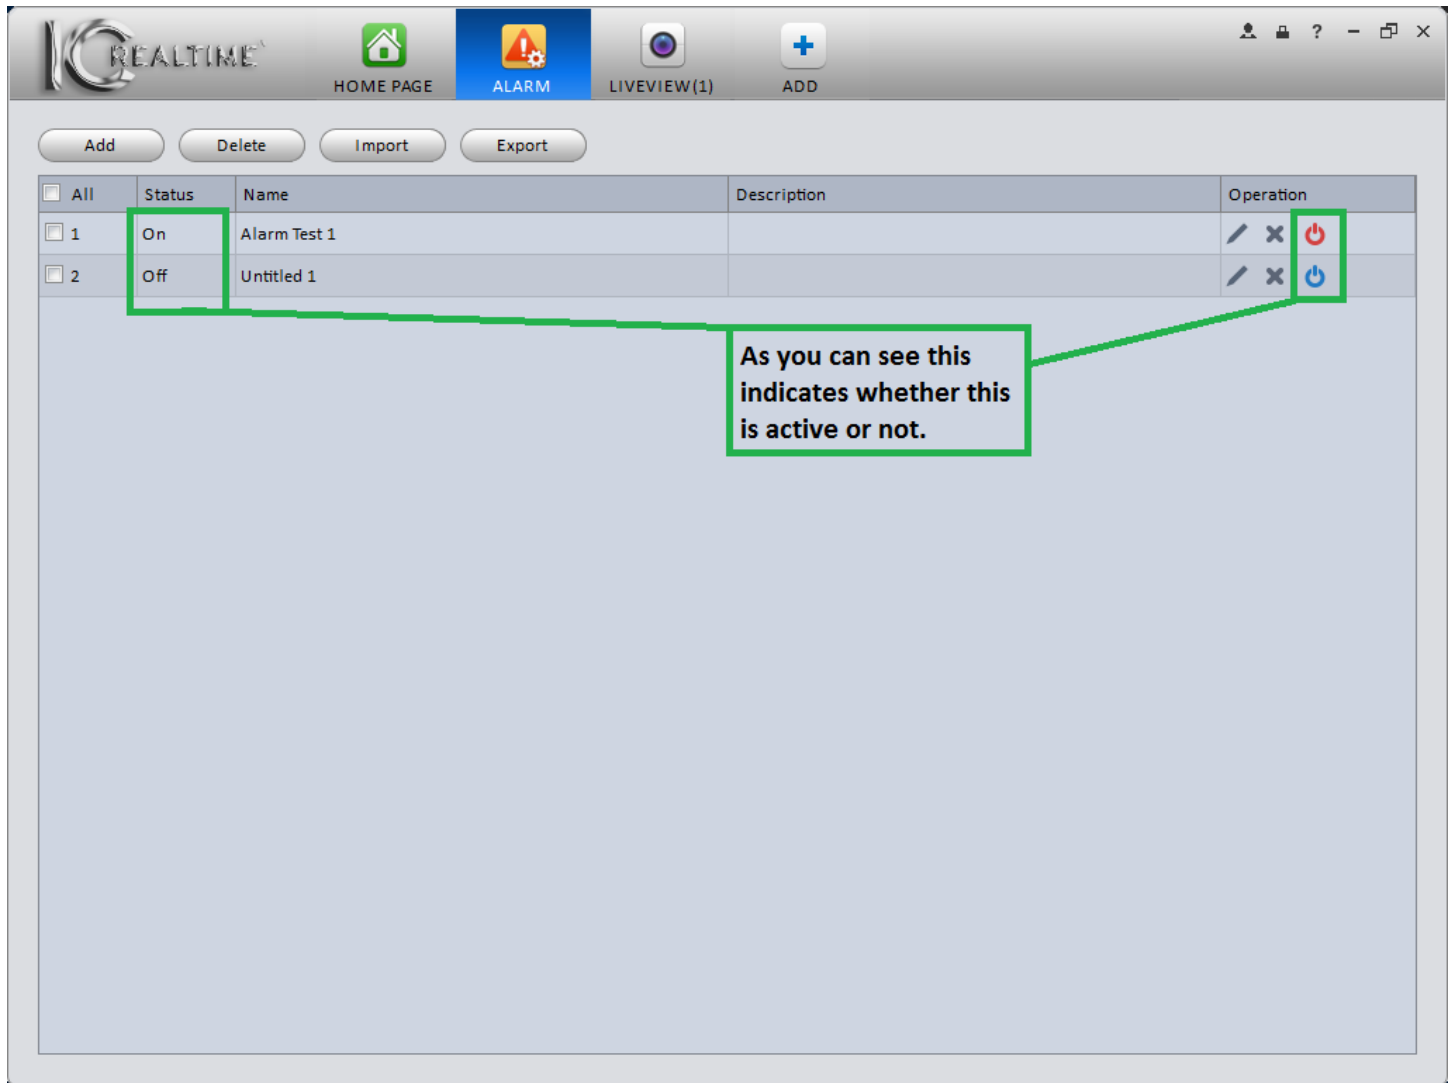


Step 7:

Last thing to note is the Status of your alarms. Very similar to an alarm on your phone or any other smart software, you can keep your alarm settings saved and simply turn them on or off from here. This is the main alarm page where you can create and delete alarms. Once created you will see the status as red or blue, for on or off, this is under status on the right hand side. You can also adjust your settings by using the pencil icon under operation too.

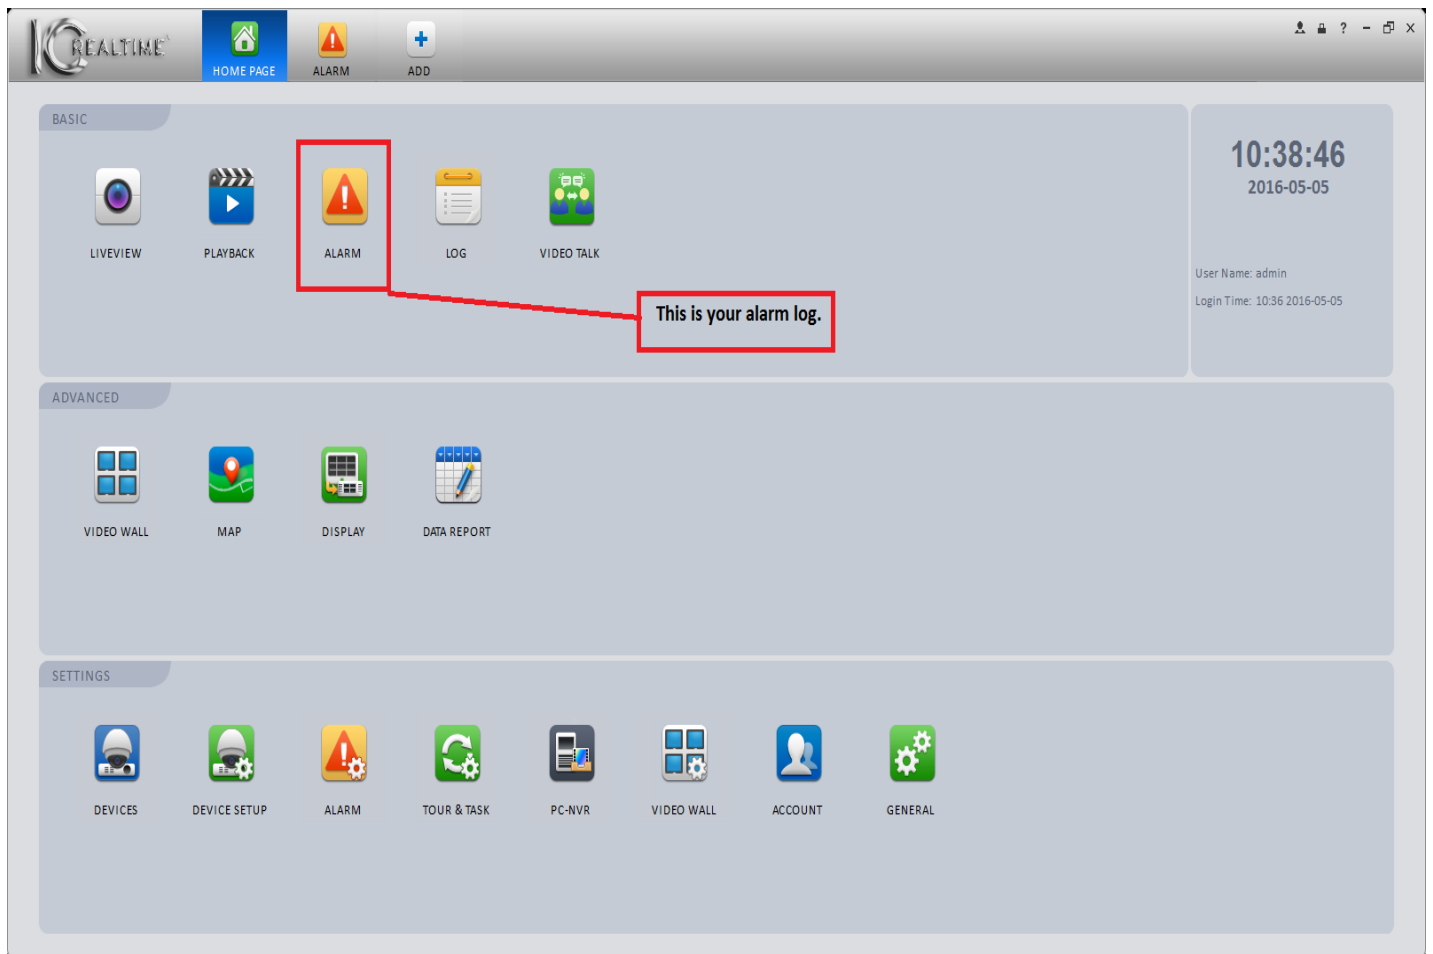

Step 8: *Checking your alarm log to see events. If you select this Alarm option in the Home Page you will be able to see all Alarms that have been triggered while the software was on. When you close the software this alarm log disappears.*

Insert IMAGE here

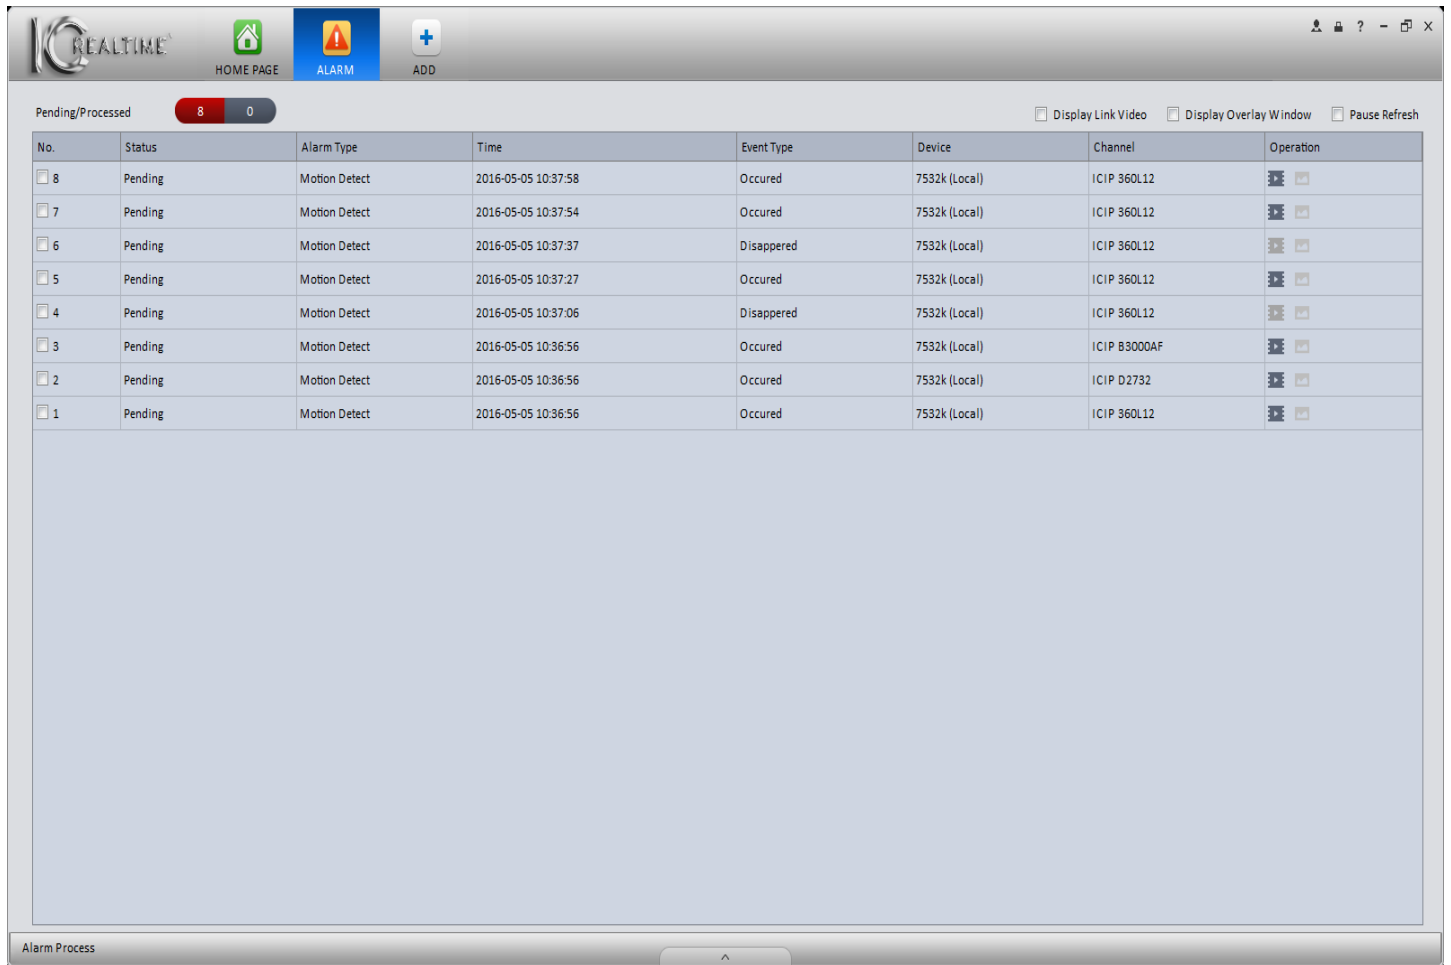

The screenshot shows the IC Realtime Alarm Process interface. At the top, there is a navigation bar with icons for HOME PAGE, ALARM, and ADD. Below this, a status bar shows 'Pending/Processed' counts as 8 and 0. To the right of the status bar are checkboxes for 'Display Link Video', 'Display Overlay Window', and 'Pause Refresh'. The main area contains a table with 8 columns: No., Status, Alarm Type, Time, Event Type, Device, Channel, and Operation. The table lists 8 pending motion detect alarms. Below the table is a large empty area labeled 'Alarm Process'.

No.	Status	Alarm Type	Time	Event Type	Device	Channel	Operation
8	Pending	Motion Detect	2016-05-05 10:37:58	Occured	7532k (Local)	ICIP 360L12	 
7	Pending	Motion Detect	2016-05-05 10:37:54	Occured	7532k (Local)	ICIP 360L12	 
6	Pending	Motion Detect	2016-05-05 10:37:37	Disappered	7532k (Local)	ICIP 360L12	 
5	Pending	Motion Detect	2016-05-05 10:37:27	Occured	7532k (Local)	ICIP 360L12	 
4	Pending	Motion Detect	2016-05-05 10:37:06	Disappered	7532k (Local)	ICIP 360L12	 
3	Pending	Motion Detect	2016-05-05 10:36:56	Occured	7532k (Local)	ICIP B3000AF	 
2	Pending	Motion Detect	2016-05-05 10:36:56	Occured	7532k (Local)	ICIP D2732	 
1	Pending	Motion Detect	2016-05-05 10:36:56	Occured	7532k (Local)	ICIP 360L12	 

Step 9:

This is what your alarm log will look like. You will have a list of times, channel, and recorder that the alarm came from.

IC Realtime LLC

www.icrealtime.com

3050 N Andrews Avenue Extension | Pompano Beach, FL 33064 | (866) 997-9009
Designs and specifications subject to change without notice. Copyright © 2015 IC Realtime, LLC. All rights reserved.