




Quick Start Guide


Guardi 2



Know Your Guardi 2

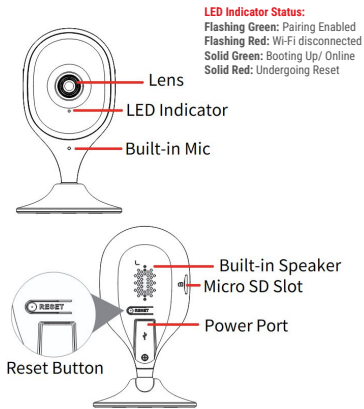

Package Contents

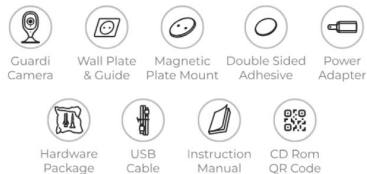


Installation




The Guardi 2 includes a Metal mount for the magnetic Base to stick onto, as well as a Double-sided adhesive.


Step 1 Mark the Mounting Holes. Use the included template to mark the screw holes and drill them. Install Wall Anchor if installing on stucco, brick, or concrete. For wood, drywall or soft surface, skip this step

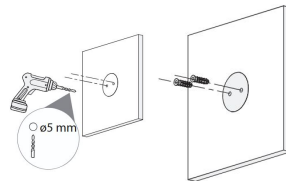


Step 2 Install the Magnetic Base. Using the Phillips-head screwdriver and included screws install the base.



Step 3 Install the Camera Body to the Base. The Base of the Guardi 2 is magnetic and will stick to the mount.



Step 4 Connect the Power cable. Connect the included power supply to the camera's Power Port and plug the other end into a wall outlet.

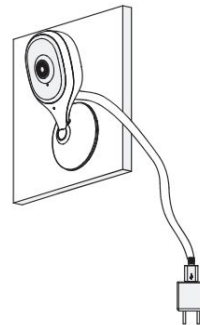


Using IC View Pro

1 Power on the Guardi 2 camera and download the **IC View Pro** App from Google Play or the Apple App Store.



2 Open the App and register a new account, if you do not already have one.




3 On the device page of the app, press the "+" icon on the upper right corner.

Note: You should see a flashing green light on the front of the camera, that indicates the bluetooth pairing is active (If not, press the reset button on the device).


4 Select "**Scan QR Code**" and follow the instruction on screen to scan the QR code, then tap "**Next**" in the following screen. (If given the option to choose **Local** or **Account**, choose **Account** as this device cannot be added locally.)

5 Wait on the **Enter Network Config Mode** screen for the temporary pop up that confirms **The device successfully connected to Bluetooth**, then tap "**Next**"

6 Log in to the local Wi-Fi network. The device will chime when it successfully connects to the local network. It will then continue to register the device to account backend.

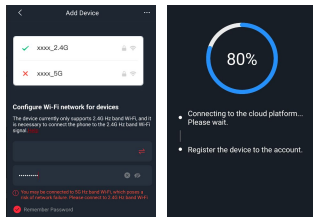

7 Set device Name, Audio preference, local Time Zone and Daylight Saving Time.




8 A notice prompting you to set your camera password will appear. Tap **Continue**, then set the camera password.


Privacy Mode

The Guardi 2 includes a convenient Privacy Mode that instantly stops live audio and video and recording, giving you complete control and peace of mind whenever you need privacy.

To quickly enable Privacy Mode, tap on the  icon on the IC View Pro App.

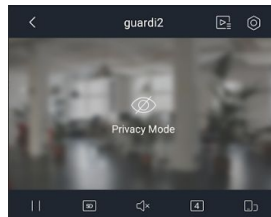

You can also go to **Device Details > Private Plan**. You can set up time periods when Privacy Mode will be enabled.

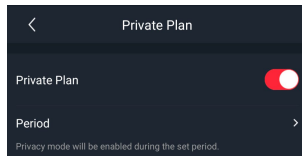

Frequently Asked Questions

Does the Guardi 2 support 5GHz Wi-Fi?

No. It works only with 2.4GHz Wi-Fi networks.

Why isn't the video camera turning on?

- Make sure the camera is using the supplied power supply and that it is connected properly.

How do I factory reset the Guardi 2?

Locate the reset button behind the camera. While powered, press and hold the **RESET** button. Release it when you hear the audio prompt/chime. After a minute, a slow green light will show the camera is ready to set up.

Why can't I connect to the Guardi 2's Wi-Fi?

The Guardi 2 does not have a built-in hotspot and instead uses bluetooth for initial pairing.

Why is the camera offline?

Check if the LED is solid green.

- If **yes**, check if your Wi-Fi router is online.
- If **no**, factory reset the camera and reconnect. Make sure the Wi-Fi signal is strong.

Why can't I connect to the device hotspot?

Make sure the IC View Pro app has Bluetooth, Location and Wi-Fi permissions.